


R&S®FSWP PHASE NOISE ANALYZER AND VCO TESTER

Specifications

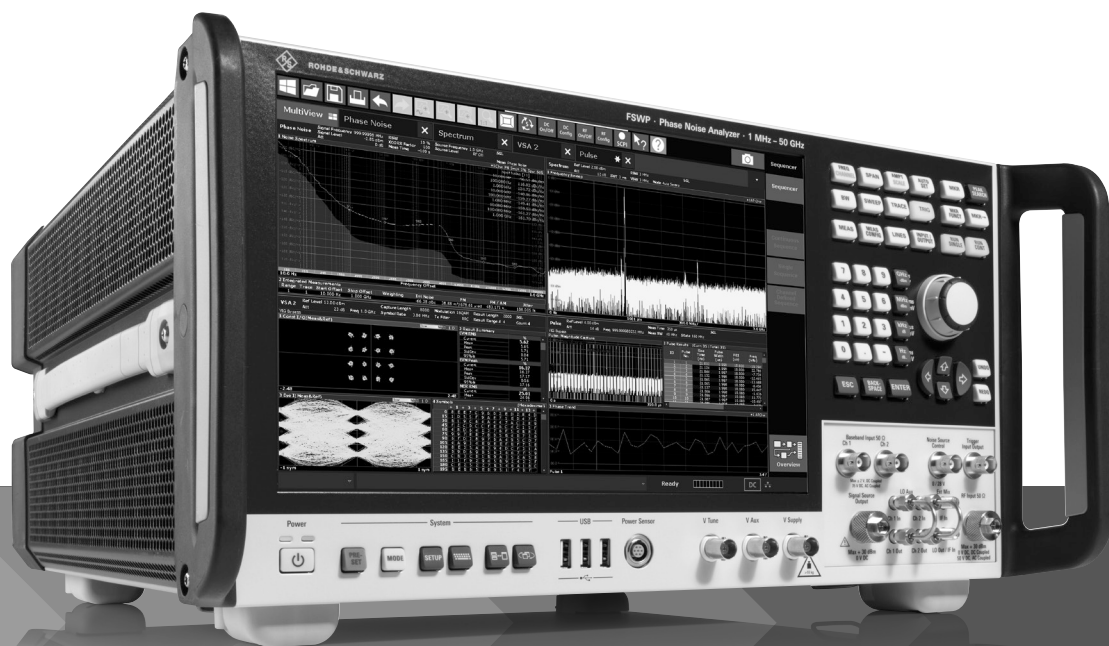

Specifications
Version 09.01

ROHDE & SCHWARZ

Make ideas real



CONTENTS

Definitions	3
Specifications.....	4
Frequency	4
Phase noise measurements	5
Measurement speed, nominal values.....	9
AM noise measurements	9
Baseband noise measurement	10
VCO characterization measurements (frequency, RF power, DC supply current)	11
Transient analysis.....	12
Allan deviation, Allan variance	12
Inputs and outputs	13
General data.....	16
Options	18
R&S®FSWP-B1 spectrum analyzer.....	18
R&S®FSWP-B13 highpass filters (R&S®FSWP-B1 option required).....	26
R&S®FSWP-B21 LO/IF connections for external mixers (for R&S®FSWP26/R&S®FSWP50).....	26
R&S®FSWP-B24 RF preamplifier (R&S®FSWP-B1 option required)	28
R&S®FSWP-B64 additive phase noise measurements	28
R&S®FSWP-K4 pulsed phase noise measurements	35
R&S®FSWP-K4 pulsed AM noise measurements	36
R&S®FSWP-K980 health and utilization monitoring service (HUMS).....	37
Ordering information	38
Options.....	38
Recommended extras.....	41
Power sensors supported (R&S®FSWP-B1 option required).....	42
Warranty and service.....	43

Definitions


General

Product data applies under the following conditions:

- Three hours of storage at ambient temperature followed by 30 minutes of warm-up operation
- Specified environmental conditions met
- Recommended calibration interval adhered to
- All internal automatic adjustments performed, if applicable

Specifications with limits

Represent warranted product performance by means of a range of values for the specified parameter. These specifications are marked with limiting symbols such as $<$, \leq , $>$, \geq , \pm , or descriptions such as maximum, limit of, minimum. Compliance is ensured by testing or is derived from the design. Test limits are narrowed by guard bands to take into account measurement uncertainties, drift and aging, if applicable.

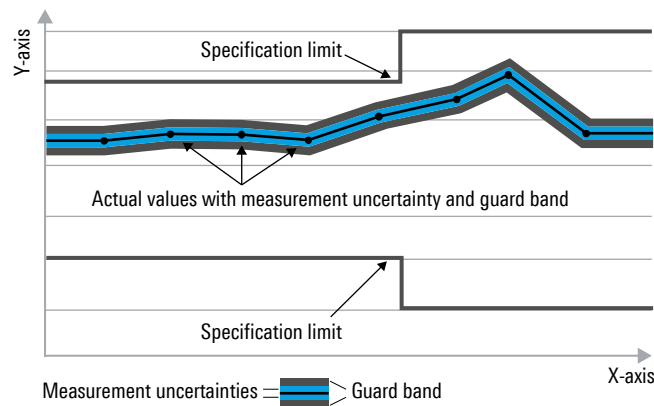

Non-traceable specifications with limits (n. trc.)

Represent product performance that is specified and tested as described under “Specifications with limits” above. However, product performance in this case cannot be warranted due to the lack of measuring equipment traceable to national metrology standards. In this case, measurements are referenced to standards used in the Rohde & Schwarz laboratories.

Specifications without limits

Represent warranted product performance for the specified parameter. These specifications are not specially marked and represent values with no or negligible deviations from the given value (e.g. dimensions or resolution of a setting parameter). Compliance is ensured by design.

Typical data (typ.)

Characterizes product performance by means of representative information for the given parameter. When marked with $<$, $>$ or as a range, it represents the performance met by approximately 80 % of the instruments at production time. Otherwise, it represents the mean value.

Nominal values (nom.)

Characterize product performance by means of a representative value for the given parameter (e.g. nominal impedance). In contrast to typical data, a statistical evaluation does not take place and the parameter is not tested during production.

Measured values (meas.)

Characterize expected product performance by means of measurement results gained from individual samples.

Uncertainties

Represent limits of measurement uncertainty for a given measurand. Uncertainty is defined with a coverage factor of 2 and has been calculated in line with the rules of the Guide to the Expression of Uncertainty in Measurement (GUM), taking into account environmental conditions, aging, wear and tear.

Device settings and GUI parameters are designated with the format “parameter: value”.

Non-traceable specifications with limits, typical data as well as nominal and measured values are not warranted by Rohde & Schwarz.

In line with the 3GPP standard, chip rates are specified in million chips per second (Mcps), whereas bit rates and symbol rates are specified in billion bit per second (Gbps), million bit per second (Mbps), thousand bit per second (kbps), million symbols per second (Msps) or thousand symbols per second (ksps), and sample rates are specified in million samples per second (Msample/s). Gbps, Mcps, Mbps, Msps, kbps, ksps and Msample/s are not SI units.

Specifications

Frequency

Frequency range, RF input		
Phase noise, AM noise measurements	R&S®FSWP8	
	DC coupled (requires R&S®FSWP-B1 option)	1 MHz to 8 GHz
	AC coupled	1 MHz to 8 GHz
	R&S®FSWP26	
	DC coupled	1 MHz to 26.5 GHz
	AC coupled	10 MHz to 26.5 GHz
	R&S®FSWP50	
	DC coupled	1 MHz to 50 GHz
	AC coupled	10 MHz to 50 GHz
	R&S®FSWP50 with R&S®FSWP-B56G option	
	DC coupled	1 MHz to 56 GHz
	AC coupled	10 MHz to 56 GHz
Baseband noise measurements	see section Baseband noise measurement	
Frequency resolution		0.01 Hz
Reference frequency, internal		
Accuracy		$\pm(\text{time since last adjustment} \times \text{aging rate} + \text{temperature drift} + \text{calibration accuracy})$
Aging per year	standard	$\pm 1 \times 10^{-7}$
	with R&S®FSWP-B4 OCXO precision frequency reference option	
	first year of operation	$\pm 5 \times 10^{-8}$
	after first year of operation	$\pm 3 \times 10^{-8}$
Temperature drift	0 °C to +50 °C	$\pm 1 \times 10^{-9}$
Achievable initial calibration accuracy	standard	$\pm 1 \times 10^{-8}$
	with R&S®FSWP-B4 OCXO precision frequency reference option	$\pm 5 \times 10^{-9}$

Phase noise measurements

Measurement results		SSB phase noise, spurious signals, integrated RMS phase deviation, residual FM, time jitter
Offset frequency range	carrier frequency \leq (maximum input frequency – 1 GHz)	1 μ Hz to max. input frequency – carrier frequency
	carrier frequency \geq (maximum input frequency – 1 GHz)	1 μ Hz to 1 GHz
Signal level range	level setting = high	–20 dBm to +30 dBm (nom.)
	level setting = low	–40 dBm to +30 dBm (nom.)
	level setting = low, I/Q lowpass \leq 10 MHz ¹	–50 dBm to +30 dBm (nom.)
Number of traces		6
Phase noise measurement uncertainty	DUT phase noise \geq 10 dB above phase noise sensitivity of R&S®FSWP ²	
	1 μ Hz \leq offset < 10 mHz	1.5 dB (nom.)
	10 mHz \leq offset < 1 MHz	< 1.2 dB ($\sigma = 0.4$ dB)
	1 MHz \leq offset \leq 30 MHz	< 1.5 dB ($\sigma = 0.5$ dB)
	30 MHz < offset	< 3 dB ($\sigma = 1.0$ dB)
Level measurement uncertainty	–20 dBm \leq signal level \leq 15 dBm, +20 °C to +30 °C	
	1 MHz \leq signal frequency < 8 GHz	< 1 dB
	8 GHz \leq signal frequency < 18 GHz	< 2 dB
	18 GHz \leq signal frequency	< 3 dB
Spurious level ³	$f_{in} < 1$ GHz	
	10 Hz \leq offset from carrier < 1 kHz	< –90 dBc
	1 kHz \leq offset from carrier \leq 30 MHz	< –100 dBc
	$f_{in} \geq 1$ GHz	
	10 Hz \leq offset from carrier < 1 kHz	< –90 dBc + 20 log(f_{in} /GHz)
	1 kHz \leq offset from carrier \leq 30 MHz	< –100 dBc + 20 log(f_{in} /GHz)
AM suppression	10 mHz < offset < 1 MHz	40 dB (nom.)
	1 MHz \leq offset \leq 30 MHz, level setting = high and internal mixer, capture range = narrow or wide	30 dB (nom.)
	1 MHz \leq offset \leq 10 MHz, level setting = low or external mixer, capture range = narrow or wide	30 dB (nom.)

¹ This I/Q lowpass can be switched on in the frequency search menu to improve sensitivity. It limits the offset frequency range to $0.3 \times$ cutoff frequency.

² Specified values for offset frequencies $\leq 30\%$ of signal frequency. The phase noise sensitivity improvement due to the number of cross-correlations is included. For DUT phase noise from 6 dB to 10 dB above phase noise sensitivity of the R&S®FSWP, add 1 dB of uncertainty. The measurement uncertainty with 95 % confidence level is defined by $\pm 2 \times \sigma$.

³ For offset frequencies > 30 MHz spurious levels are not warranted but meet typically the same specification as for 30 MHz offset.

Phase noise sensitivity with R&S®FSWP-B61 cross-correlation (low phase noise) option


For offset frequencies ≥ 1 Hz start offset = 1 Hz, for offset frequencies < 1 Hz start offset = 0.01 Hz, cross-correlation factor = 1, frequency reference internal, internal reference loop bandwidth 30 Hz, signal level ≥ 10 dBm⁴, for instruments with R&S®FSWP-B64 option: signal source output = off, for sensitivity with signal source = on, see section R&S®FSWP-B64 additive phase noise measurements, SSB phase noise specified values in dBc (1 Hz)

RF input frequency	Offset frequency from the carrier										
	0.01 Hz	0.1 Hz	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
1 MHz	-60	-105	-118	-136	-148	-166	-176	-176			
10 MHz	-40	-86	-115	-132	-142	-160	-170	-170	-170		
100 MHz	-20	-66	-95	-117	-140	-166	-170	-173	-175	-175	-175
1 GHz	0	-46	-75	-97	-120	-150	-166	-173	-173	-173	-173
3 GHz	+10	-36	-65	-87	-110	-140	-160	-164	-170	-173	-173
7 GHz	+17	-29	-58	-80	-103	-133	-153	-157	-163	-173	-173
10 GHz	+20	-26	-55	-77	-100	-133	-152	-153	-157	-173	-175
16 GHz	+24	-22	-51	-73	-96	-129	-148	-149	-153	-170	-171
26 GHz	+28	-18	-47	-69	-92	-125	-144	-145	-149	-166	-167
50 GHz	+34	-12	-41	-63	-86	-119	-138	-139	-143	-160	-161
54 GHz	+35	-11	-40	-62	-85	-118	-137	-138	-142	-158	-159
56 GHz	+36	-10	-39	-61	-84	-117	-136	-137	-141	-156	-157

Improvement of phase noise sensitivity by number of cross-correlations (with R&S®FSWP-B61 option)

Offset frequencies ≥ 1 Hz⁵

Cross-correlations	10	100	1000	10 000
Improvement	5 dB	10 dB	15 dB	20 dB

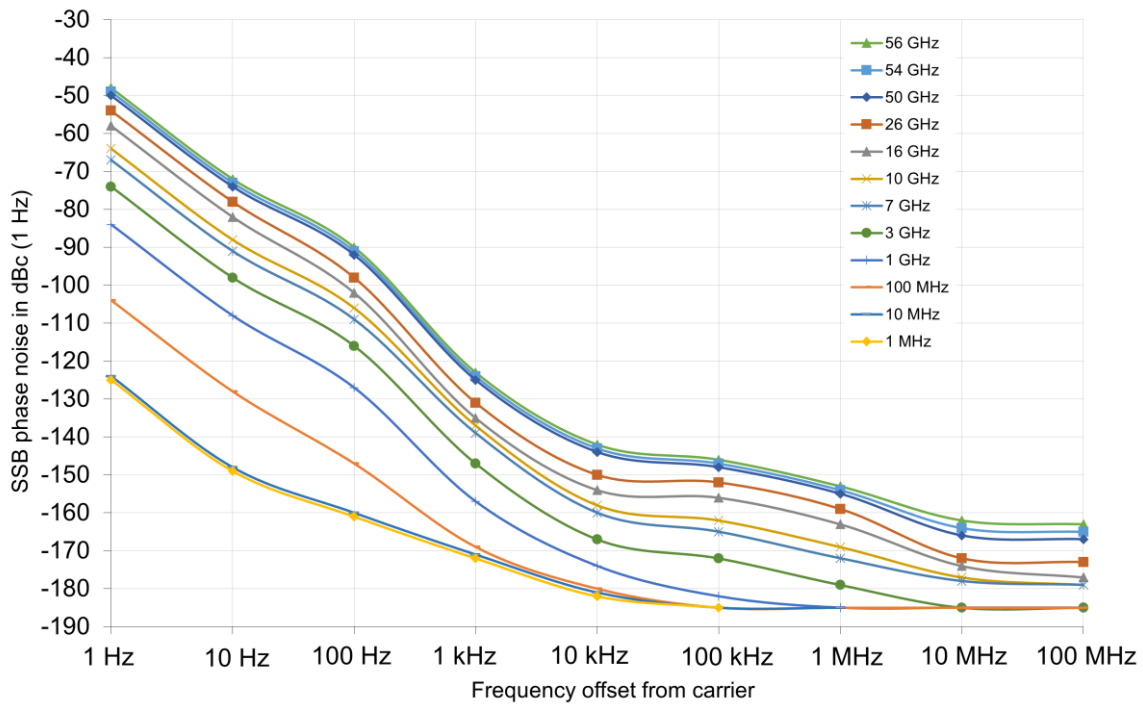

Typical phase noise at different center frequencies with R&S®FSWP-B61 option (start offset = 10 mHz)

⁴ For signal levels below +10 dBm, the phase noise sensitivity is limited by the thermal noise floor of -177 dBm (1 Hz).

⁵ For offset frequencies below 1 Hz, the improvement impact of cross-correlation is limited by the coupling between the two R&S®FSWP local oscillators. The improvement achievable in this case ranges from 15 dB (nom.) at 0.1 Hz frequency offset to 3 dB (nom.) at a frequency offset ≤ 30 mHz.

Phase noise sensitivity with R&S®FSWP-B60 cross-correlation option

Start offset 1 Hz, cross-correlation factor = 1, frequency reference internal, signal level ≥ 10 dBm ⁴, without R&S®FSWP-B4 option, for instruments with R&S®FSWP-B64 option: signal source output = off, for sensitivity with signal source = on, see section R&S®FSWP-B64 additive phase noise measurements, specified values in dBc (1 Hz)


RF input frequency	Offset frequency from the carrier								
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
1 MHz	-118	-136	-148	-166	-176	-176			
10 MHz	-106	-130	-140	-158	-170	-170	-170		
100 MHz	-86	-116	-136	-163	-170	-173	-175	-175	-175
1 GHz	-66	-96	-116	-143	-166	-173	-173	-173	-173
3 GHz	-56	-86	-106	-133	-160	-164	-170	-173	-173
7 GHz	-49	-79	-99	-130	-153	-157	-163	-173	-173
10 GHz	-46	-76	-96	-128	-147	-150	-155	-173	-173
16 GHz	-42	-72	-92	-124	-143	-146	-151	-170	-170
26 GHz	-38	-68	-88	-120	-139	-142	-147	-166	-166
50 GHz	-32	-62	-82	-114	-133	-136	-141	-160	-160
54 GHz	-31	-61	-81	-113	-132	-135	-140	-158	-158
56 GHz	-30	-60	-80	-112	-131	-134	-139	-156	-156

R&S®FSWP-B4 option improves the phase noise sensitivity at 1 Hz and 10 Hz offsets by 5 dB (nom.).
At other offsets the above specification applies.


Improvement of phase noise sensitivity by number of cross-correlations (with R&S®FSWP-B60 option)

Offset frequencies ≥ 1 Hz ⁵

Cross-correlations	10	100	1000	10 000
Improvement	5 dB	10 dB	15 dB	20 dB

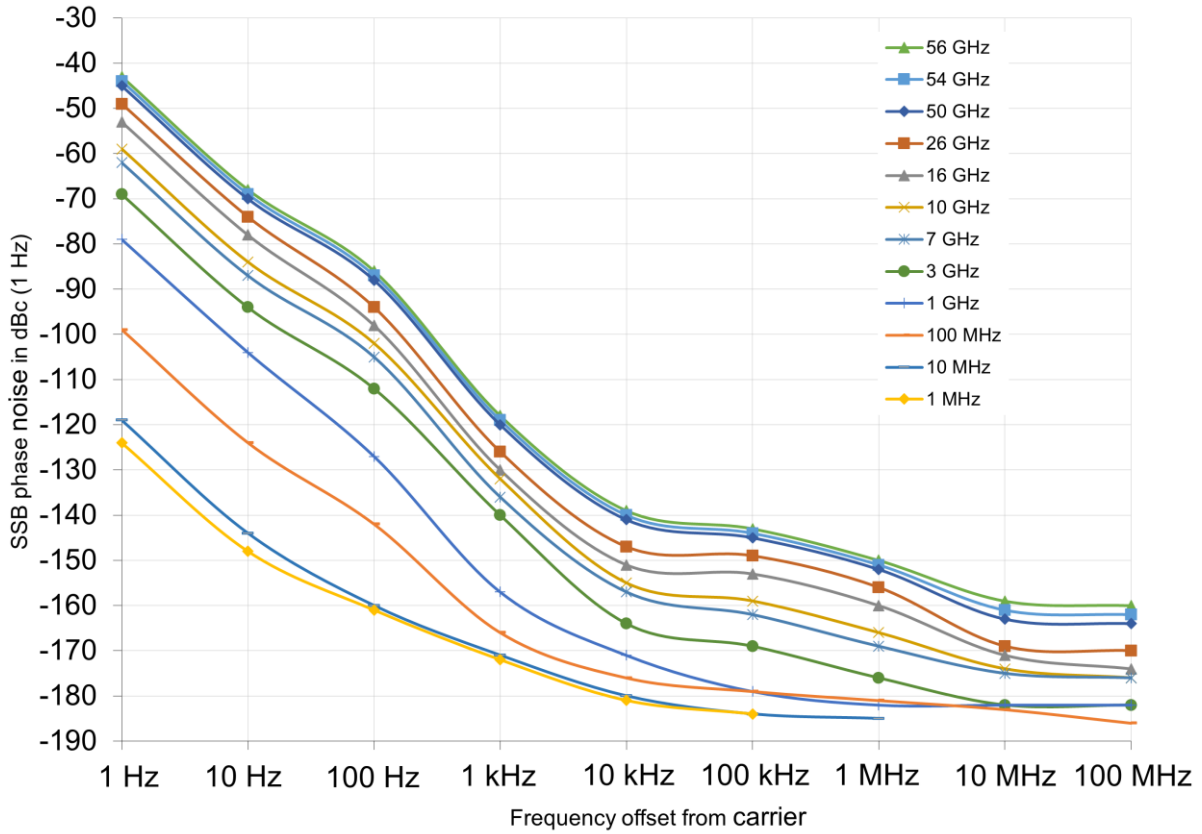

Typical phase noise at different center frequencies with R&S®FSWP-B60 and R&S®FSWP-B4 options (start offset = 1 Hz)

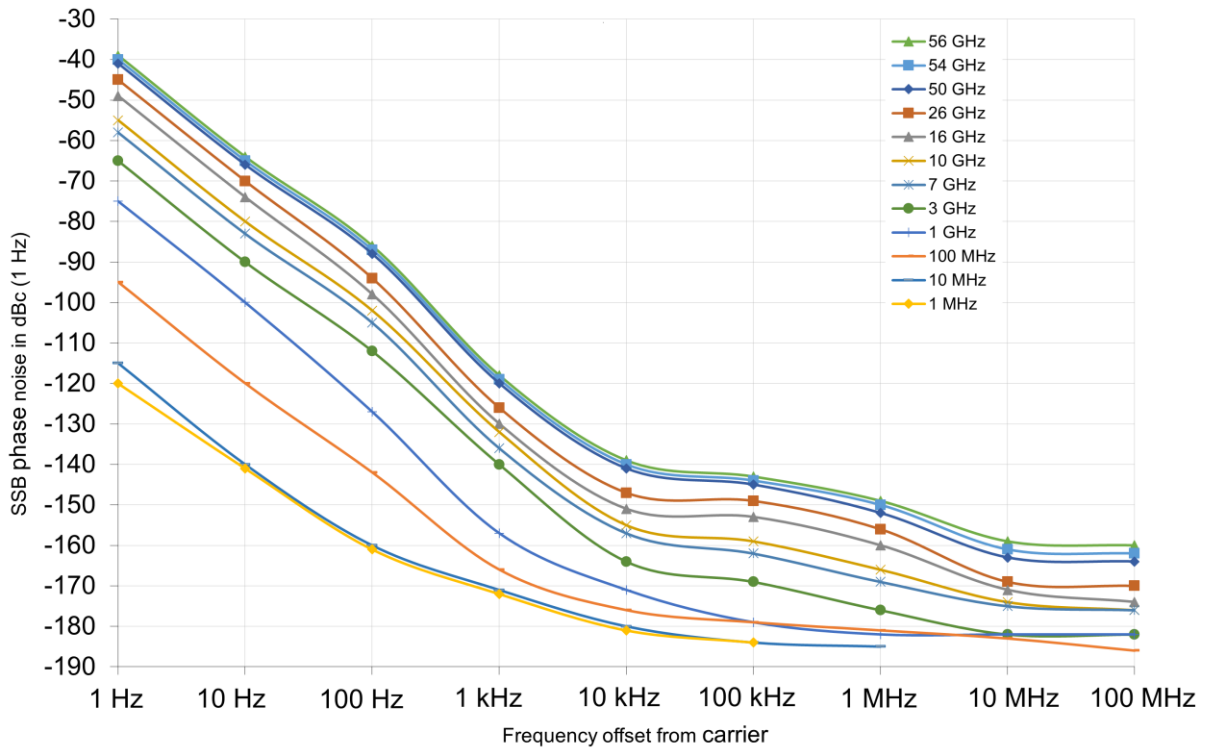

Typical phase noise at different center frequencies with R&S®FSWP-B60 option (start offset = 1 Hz)

Measurement speed, nominal values

The measurement times in the table below apply to the following conditions:

auto frequency = off, half decade config = auto, RBW = 10 %, cross-correlation factor ≥ 10 and measurement times ≥ 2 s.

Measurement times normalized to cross-correlation factor = 1.

Time per cross-correlation	span	
	0.1 Hz to 100 MHz	27 s
	1 Hz to 100 MHz	6.7 s
	10 Hz to 100 MHz	0.8 s
	100 Hz to 100 MHz	0.1 s
	1 kHz to 100 MHz	0.01 s
	10 kHz to 100 MHz	0.001 s

To obtain the measurement time for a given number of cross-correlations (without automatic signal frequency search), multiply the above figures by the number of cross-correlations.

AM noise measurements

Offset frequency range	input signal ≤ 100 MHz	1 μ Hz to 40 % of carrier frequency
	input signal > 100 MHz	1 μ Hz to 40 MHz
AM noise measurement uncertainty	DUT AM noise ≥ 15 dB above AM noise sensitivity of R&S®FSWP ⁶	
	1 μ Hz $<$ offset < 10 mHz	2 dB (nom.)
	10 mHz $<$ offset < 1 MHz	< 2 dB ($\sigma = 0.67$ dB)
	1 MHz \leq offset ≤ 30 MHz	< 2.5 dB ($\sigma = 0.83$ dB)
Level measurement uncertainty	-20 dBm \leq signal level $\leq +15$ dBm, $+20$ °C to $+30$ °C	
	1 MHz \leq signal frequency < 8 GHz	< 1 dB
	8 GHz \leq signal frequency < 18 GHz	< 2 dB
	18 GHz \leq signal frequency	< 3 dB

AM noise sensitivity

R&S®FSWP8, R&S®FSWP26, R&S®FSWP50 with R&S®FSWP-B60 option, model .50 or R&S®FSWP-B61 option, model .50

Start offset 1 Hz, cross-correlations = 1, signal level ≥ 10 dBm ⁴ , specified values in dBc (1 Hz), for typical values subtract 6 dB									
RF input frequency	Offset frequency from the carrier								
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
100 MHz $\leq f \leq 1$ GHz	-105	-120	-135	-150	-158	-165	-165	-165	-165
1 GHz $< f \leq 12$ GHz	-100	-115	-130	-145	-155	-160	-165	-165	-165
12 GHz $< f \leq 18$ GHz	-90	-105	-120	-135	-150	-160	-165	-165	-165
18 GHz $< f \leq 33$ GHz	-80	-95	-110	-125	-140	-150	-160	-165	-165
33 GHz $< f \leq 50$ GHz	-70	-85	-100	-115	-130	-140	-150	-160	-160

R&S®FSWP50 with R&S®FSWP-B60 option, model .51 or R&S®FSWP-B61 option, model .51

Start offset 1 Hz, cross-correlations = 1, signal level ≥ 10 dBm ⁴ , specified values in dBc (1 Hz), for typical values subtract 6 dB									
RF input frequency	Offset frequency from the carrier								
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
100 MHz $\leq f \leq 1$ GHz	-105	-120	-135	-150	-158	-165	-165	-165	-165
1 GHz $< f \leq 12$ GHz	-100	-115	-130	-145	-155	-160	-165	-165	-165
12 GHz $< f \leq 18$ GHz	-90	-105	-120	-135	-150	-160	-165	-165	-165
18 GHz $< f \leq 33$ GHz	-90	-100	-110	-125	-140	-150	-160	-165	-165
33 GHz $< f \leq 56$ GHz	-85	-95	-105	-115	-130	-140	-150	-160	-160

Improvement of AM noise sensitivity by number of cross-correlations				
Cross-correlations	10	100	1000	10 000
Improvement	5 dB	10 dB	15 dB	20 dB

⁶ Specified values for offset frequencies ≤ 30 % of signal frequency. The AM noise sensitivity improvement due to the number of cross-correlations is included. For DUT phase noise from 6 dB to 15 dB above AM noise sensitivity of the R&S®FSWP, add 1 dB of uncertainty.

Baseband noise measurement

Frequency range	R&S®FSWP8	
	RF input, AC coupled	1 MHz to 8 GHz
	RF input, DC coupled (R&S®FSWP-B1 required)	10 mHz to 8 GHz
	R&S®FSWP26	
	RF input, AC coupled	10 MHz to 26.5 GHz
	RF input, DC coupled (R&S®FSWP-B1 required)	10 mHz to 26.5 GHz
	R&S®FSWP50	
	RF input, AC coupled	10 MHz to 50 GHz
	RF input, DC coupled (R&S®FSWP-B1 required)	10 mHz to 50 GHz
	R&S®FSWP50 with R&S®FSWP-B56G option	
	RF input, AC coupled	10 MHz to 56 GHz
	RF input, DC coupled (R&S®FSWP-B1 required)	10 mHz to 56 GHz
	Baseband input	
AC coupled ⁷ , cutoff frequency = 0.3 Hz	0.3 Hz to 40 MHz	
AC coupled ⁷ , cutoff frequency = 100 Hz	100 Hz to 40 MHz	
DC coupled	10 mHz to 40 MHz	
Level measurement range	RF input	< +8 dBm
	baseband input	< +4 dBm
Level measurement uncertainty	+20 °C to +30 °C	
	10 mHz < f _{in} < 1 MHz	< 2 dB (nom.)
	1 MHz ≤ f _{in} ≤ 30 MHz	< 2.5 dB (nom.)
Units	dBm (1 Hz), dBμV (1 Hz), dBV (1 Hz), V (√Hz)	

Baseband noise level

Start offset 1 Hz, cross-correlation factor = 1, input = baseband input, 50 Ω terminated, specified values in dBm (1 Hz), numbers in brackets are typical values in dBc (1 Hz).

Input frequency	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	30 MHz
Noise level	-120 (-126)	-130 (-136)	-145 (-151)	-154 (-160)	-160 (-166)	-160 (-166)	-160 (-170)	-160 (-170)	-160 (-170)

⁷ AC coupling with baseband input is only available for baseband input channel 1 of R&S®FSWP50 with R&S®FSWP-B60 option, model .51 or R&S®FSWP-B61 option, model .51.

VCO characterization measurements (frequency, RF power, DC supply current)

Sweep parameters		DC tune voltage (V_{tune})
		DC auxiliary voltage (V_{aux})
		DC supply voltage (V_{supply})
		DC supply current (I_{supply})
Measurement parameters		frequency
		RF power
		DC supply current
		tuning sensitivity
Frequency resolution		100 mHz to 100 kHz in steps of 1, 10, ...
RF power measurement range	$1 \text{ MHz} \leq \text{signal frequency} \leq 100 \text{ MHz}$	-15 dBm to +27 dBm
	signal frequency > 100 MHz	-20 dBm to +27 dBm
Level measurement uncertainty	$-20 \text{ dBm} \leq \text{signal level} \leq 15 \text{ dBm}$, +20 °C to +30 °C	
	$1 \text{ MHz} \leq \text{signal frequency} < 8 \text{ GHz}$	< 1 dB
	$8 \text{ GHz} \leq \text{signal frequency} < 18 \text{ GHz}$	< 2 dB
	signal frequency $\geq 18 \text{ GHz}$	< 3 dB
V_{tune}		
setting range		-10 V to +28 V
setting resolution		1 mV
setting uncertainty		$\pm(0.2 \% \text{ of reading} + 8 \text{ mV})$ (meas.)
reading uncertainty		$\pm(0.5 \% \text{ of reading} + 25 \text{ mV})$ (meas.)
output resistance		50 Ω
output settling time		7 ms/V
noise level		< 1 nV (RMS) at 10 kHz (meas.)
V_{aux}		
setting range		-10 V to +10 V
setting resolution		1 mV
setting uncertainty		$\pm(0.1 \% \text{ of reading} + 2 \text{ mV})$ (meas.)
reading uncertainty		$\pm(0.5 \% \text{ of reading} + 25 \text{ mV})$ (meas.)
output resistance		5 Ω
output settling time		1 ms/V
noise level		< 10 nV (RMS) at 10 kHz (meas.)
V_{supply}		
setting range		0 to 16 V
setting resolution		1 mV
setting uncertainty		$\pm(0.1 \% \text{ of reading} + 1 \text{ mV})$ (meas.)
reading uncertainty		$\pm(0.5 \% \text{ of reading} + 25 \text{ mV})$ (meas.)
output resistance		0.5 Ω
output settling time		50 ms/V
noise level		< 10 nV (RMS) at 10 kHz (meas.)
I_{supply}		
setting range		10 mA to 2000 mA
setting resolution		1 mA
setting uncertainty		$\pm(0.5 \% \text{ of reading} + 0.5 \text{ mA})$ (meas.)
reading uncertainty		$\pm(0.5 \% \text{ of reading} + 1.5 \text{ mA})$ (meas.)

Transient analysis

Frequency range	R&S®FSWP8	
	DC coupled (requires R&S®FSWP-B1 option)	1 MHz to 8 GHz
	AC coupled	1 MHz to 8 GHz
	R&S®FSWP26	
	DC coupled	1 MHz to 26.5 GHz
	AC coupled	10 MHz to 26.5 GHz
	R&S®FSWP50	
	AC coupled	10 MHz to 50 GHz
Measurement parameters	narrow mode/wide mode	frequency
	narrow mode additionally	phase
Frequency transient bandwidth	narrow mode	40 MHz
	wide mode	256 MHz to 8 GHz
Frequency uncertainty		$\pm(\text{resolution} + \text{reference frequency accuracy})$
Phase uncertainty	DUT signal locked to target frequency	$0.05^\circ + 0.1^\circ/\text{GHz}$
RF input level range	narrow mode	-20 dBm to +20 dBm
	wide mode	
	256 MHz to 6 GHz	-15 dBm to +20 dBm
	6 GHz to 7 GHz	-10 dBm to +20 dBm
	7 GHz to 8 GHz	0 dBm to +20 dBm
Time span		1 μs to 16 s
Time resolution		> 20 ns
Measurement trigger	trigger mode	free run, external, frequency
	external trigger polarity	positive, negative (3.3 V TTL level)
	pretrigger delay	$(-1) \times \text{time span to 16 s}$

Frequency resolution, narrow mode

Observation time	1 μs	10 μs	100 μs	1 ms	10 ms	100 ms	1 s	10 s	16 s
Minimum VBW	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz
Maximum VBW	5 MHz	5 MHz	5 MHz	5 MHz	625 kHz	96 kHz	10 kHz	1 kHz	625 Hz
Measurement points	51	501	5001	50001	62501	100001	100001	100001	100001
Time resolution at max. VBW	20 ns	20 ns	20 ns	20 ns	160 ns	1 μs	10 μs	100 μs	160 μs
Frequency resolution at min. VBW for span > 1 MHz	20 Hz	20 Hz	20 Hz	20 Hz	20 Hz	20 Hz	20 Hz	20 Hz	20 Hz
Frequency resolution at min. VBW for span \leq 1 MHz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz
Frequency resolution at max. VBW	57 kHz	57 kHz	57 kHz	57 kHz	1.2 kHz	500 Hz	30 Hz	30 Hz	30 Hz

Frequency resolution, wide mode (256 MHz to 8 GHz)

Observation time	1 μs	10 μs	100 μs	1 ms	10 ms	100 ms	1 s	10 s	16 s
Minimum VBW	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz
Maximum VBW	100 kHz	100 kHz	100 kHz	100 kHz	100 kHz	96 kHz	10 kHz	1 kHz	625 Hz
Measurement points	51	501	5001	50001	62501	100001	100001	100001	100001
Time resolution at max. VBW	20 ns	20 ns	20 ns	20 ns	160 ns	1 μs	10 μs	100 μs	160 μs
Frequency resolution at min. VBW	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz	1 Hz
Frequency resolution at max. VBW	15 MHz	15 MHz	1 MHz	20 kHz	20 kHz	5 kHz	250 Hz	20 Hz	20 Hz

Allan deviation, Allan variance

Frequency range	R&S®FSWP8		1 MHz to 8 GHz
	R&S®FSWP26		1 MHz to 26.5 GHz
	R&S®FSWP50		1 MHz to 50 GHz
Measurement range	τ		100 ns to 1 000 000 s
Allan deviation	reference frequency internal and with R&S®FSWP-B61 option		1.0×10^{-13} at $\tau = 1$ s (nom.)
			1.1×10^{-11} at $\tau = 1000$ s (nom.)
	reference frequency with highly stable external reference, reference loop bandwidth 100 Hz		8.8×10^{-14} at $\tau = 1$ s (nom.)
			7.0×10^{-15} at $\tau = 1000$ s (nom.)

Inputs and outputs

RF input		
Impedance		50 Ω
Connector	R&S®FSWP8	N female
	R&S®FSWP26	APC 3.5 mm male (compatible with SMA)
	R&S®FSWP50	1.85 mm male (compatible with 2.4 mm)
VSWR	R&S®FSWP8 without R&S®FSWP-B1 option	
	10 MHz \leq f < 3 GHz	1.5 (nom.)
	3 GHz \leq f \leq 8 GHz	2.0 (nom.)
	R&S®FSWP8 with R&S®FSWP-B1 option	
	RF attenuation \leq 4 dB	
	10 MHz \leq f \leq 8 GHz	typ. 1.87 ⁸
	5 dB \leq RF attenuation \leq 9 dB	
	10 MHz \leq f < 1 GHz	< 1.5, typ. 1.20 ⁸
	1 GHz \leq f < 3.6 GHz	< 1.5, typ. 1.31 ⁸
	3.6 GHz \leq f \leq 8 GHz	< 2.0, typ. 1.51 ⁸
	RF attenuation \geq 10 dB	
	10 MHz \leq f < 1 GHz	< 1.2, typ. 1.09 ⁸
	1 GHz \leq f < 3.6 GHz	< 1.5, typ. 1.19 ⁸
	3.6 GHz \leq f \leq 8 GHz	< 2.0, typ. 1.42 ⁸
	R&S®FSWP26, R&S®FSWP50	
	RF attenuation \leq 4 dB	
	10 MHz \leq f \leq 26.5 GHz	typ. 1.87 ⁸
	26.5 GHz < f \leq 40 GHz	typ. 2.0 ⁸
	40 GHz < f \leq 50 GHz	2.0 (nom.)
	5 dB \leq RF attenuation \leq 9 dB	
	10 MHz \leq f \leq 3.5 GHz	< 1.5, typ. 1.24 ⁸
	3.5 GHz < f \leq 8 GHz	< 1.8, typ. 1.26 ⁸
	8 GHz < f \leq 18 GHz	< 1.8, typ. 1.39 ⁸
	18 GHz < f \leq 26.5 GHz	< 2.0, typ. 1.43 ⁸
	26.5 GHz < f \leq 40 GHz	< 2.5, typ. 1.8 ⁸
	40 GHz < f \leq 50 GHz	2.0 (nom.)
	RF attenuation \geq 10 dB	
10 MHz \leq f \leq 3.5 GHz	< 1.2, typ. 1.12 ⁸	
3.5 GHz < f \leq 8 GHz	< 1.5, typ. 1.19 ⁸	
8 GHz < f \leq 18 GHz	< 1.5, typ. 1.25 ⁸	
18 GHz < f \leq 26.5 GHz	< 2.0, typ. 1.37 ⁸	
26.5 GHz < f \leq 40 GHz	< 2.5, typ. 1.7 ⁸	
40 GHz < f \leq 56 GHz	2.0 (nom.)	
Setting range of attenuator	R&S®FSWP8	
	without R&S®FSWP-B1 option	no user accessible attenuator
	with R&S®FSWP-B1 option	0 dB to 75 dB, in 5 dB steps ⁹
	R&S®FSWP26, R&S®FSWP50	
		0 dB to 75 dB, in 5 dB steps ⁹

⁸ Typical VSWR performance: performance expected to be met in 95 % of the cases with a confidence level of 95 %, temperature range +20 °C to +30 °C, input set to DC coupling. These values are not warranted and are subject to modification if a significant change in the statistical behavior of production instruments is observed.

⁹ With R&S®FSWP-B1 option in spectrum analyzer mode: 0 dB to 79 dB, mechanical RF attenuator: 5 dB steps, electronic IF attenuator: 1 dB steps.

Maximum RF input level		
DC voltage	AC coupled	50 V
	DC coupled	0 V
CW RF power	R&S®FSWP8 without R&S®FSWP-B1 option	
	input frequency < 5 MHz	20 dBm (= 0.1 W)
	input frequency ≥ 5 MHz	30 dBm (= 1 W)
	R&S®FSWP8 with R&S®FSWP-B1 option, R&S®FSWP26, R&S®FSWP50	
Pulse spectral density	RF attenuation = 0 dB, RF preamplifier off	97 dB μ V/MHz
	R&S®FSWP8 without R&S®FSWP-B1 option	
Maximum pulse voltage	any hardware setting	50 V
	R&S®FSWP8 with R&S®FSWP-B1 option, R&S®FSWP26, R&S®FSWP50	
	RF attenuation < 10 dB	50 V
	RF attenuation ≥ 10 dB	150 V
Maximum pulse energy, pulse duration $\tau = 10 \mu$ s	R&S®FSWP8 without R&S®FSWP-B1 option	
	any hardware setting	0.5 mWs
	R&S®FSWP8 with R&S®FSWP-B1 option, R&S®FSWP26, R&S®FSWP50	
	RF attenuation ≥ 10 dB	1 mWs

V_{supply}		
Connector		BNC female, 50 Ω (nom.)
Output voltage		0 V to 16 V
Output current		0 mA to 2000 mA

V_{aux}		
Connector		BNC female, 50 Ω (nom.)
Output voltage		-10 V to +10 V
Output current		±100 mA

V_{tune}		
Connector		BNC female, 50 Ω (nom.)
Output voltage		-10 V to +28 V
Output current		±20 mA

Baseband input channel 1		
Connector		BNC female, 50 Ω (nom.)
Input impedance	AC coupled ⁷ , cutoff frequency = 0.3 Hz	10 k Ω (nom.)
	AC coupled ⁷ , cutoff frequency = 100 Hz	50 Ω (nom.)
	DC coupled	50 Ω (nom.)
Input frequency range	AC coupled ⁷ , cutoff frequency = 0.3 Hz	0.3 Hz to 40 MHz
	AC coupled ⁷ , cutoff frequency = 100 Hz	100 Hz to 40 MHz
	DC coupled	DC to 40 MHz
Maximum AC input level		20 dBm
Maximum DC input level	AC coupled ⁷ , cutoff frequency = 0.3 Hz	±35 V
	AC coupled ⁷ , cutoff frequency = 100 Hz	±35 V
	DC coupled	±2 V

Baseband input channel 2		
Connector		BNC female, 50 Ω (nom.)
Input impedance		50 Ω (nom.)
Input frequency range		DC to 40 MHz
Maximum input level		±2 V

Noise source control		
Connector		BNC female, 50 Ω (nom.)
Output voltage		0 V/28 V, max. 100 mA, switchable (nom.)

Trigger input/output		
Connector		BNC female, 50 Ω (nom.)

Power sensor		
Connector		7-pin LEMOSA female for R&S®FS-SNSxx smart noise sources and R&S®NRP-Zxx power sensors

Reference input 1 MHz to 50 MHz		
Connector		BNC female, 50 Ω (nom.)
Input impedance		50 Ω (nom.)
Input frequency range		1 MHz ≤ f _{in} ≤ 50 MHz, in 1 Hz steps
Required level		> 0 dBm

Reference input 100 MHz/1 GHz		
Connector		SMA female, 50 Ω (nom.)
Input impedance		50 Ω (nom.)
Input frequency range		100 MHz, 1 GHz
Required level		0 dBm to 10 dBm

Reference output 10 MHz								
Connector		BNC female, 50 Ω (nom.)						
Output impedance		50 Ω (nom.)						
Output frequency		10 MHz						
Level		10 dBm (nom.)						
Nominal phase noise with R&S®FSWP-B61 or R&S®FSWP-B4 option, internal reference loop bandwidth 30 Hz								
Offset frequency from the carrier	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	3 MHz
Phase noise in dBc (1 Hz)	-110	-134	-146	-157	-165	-166	-167	-168

Reference output 1 MHz to 50 MHz		
Connector		BNC female, 50 Ω (nom.)
Output impedance		50 Ω (nom.)
Output frequency	internal reference	not active
	external reference	same as reference input signal
Level		same as reference input signal

Reference output 100 MHz								
Connector		SMA female, 50 Ω (nom.)						
Output impedance		50 Ω (nom.)						
Output frequency		100 MHz						
Level		6 dBm (nom.)						
Nominal phase noise with R&S®FSWP-B61 or R&S®FSWP-B4 option, internal reference loop bandwidth 30 Hz								
Offset frequency from the carrier	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz
Phase noise in dBc (1 Hz)	-91	-116	-133	-154	-162	-163	-164	-164

Reference output 640 MHz								
Connector		SMA female, 50 Ω (nom.)						
Output impedance		50 Ω (nom.)						
Output frequency		640 MHz						
Level		16 dBm (nom.)						
Nominal phase noise with R&S®FSWP-B61 or R&S®FSWP-B4 option, internal reference loop bandwidth 30 Hz								
Offset frequency from the carrier	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz
Phase noise in dBc (1 Hz)	-77	-101	-117	-145	-160	-165	-166	-167

IF/video output (only supported with R&S®FSWP-B1 option in spectrum analyzer mode)		
Connector		BNC female, 50 Ω (nom.)
IF out		
Bandwidth		equal to RBW setting
IF frequency		(RBW/2) to (240 MHz – RBW/2)
Output level	center frequency > 10 MHz, span = 0 Hz or I/Q analyzer on, signal at reference level and center frequency	0 dBm (nom.)

Video out		
Bandwidth		equal to VBW setting
Output scaling	logarithmic display scale	logarithmic
	linear display scale	linear
Output level	center frequency > 10 MHz, span = 0 Hz, signal at reference level and center frequency	1 V at 50 Ω load (nom.)

IEC/IEEE bus control		
		interface in line with IEC 625-2 (IEEE-488.2)
Command set		SCPI 1997.0
Connector		24-pin Amphenol female
Interface functions		SH1, AH1, T6, L4, SR1, RL1, PP1, DC1, DT1, C0

LAN interface		
Connector		10/100/1000BASE-T RJ-45

External monitor		
Connectors		DVI-D, DisplayPort Rev 1.1

USB interface		
		7 ports, type A plug, version 2.0

General data

Display		
Resolution		30.7 cm (12.1"), WXGA color touchscreen
Pixel failure rate		1280 × 800 pixel (WXGA resolution)
		< 1 × 10 ⁻⁵

Data storage		
Internal	standard	solid-state drive ≥ 256 Gbyte
External		supports USB 2.0 compatible memory devices

Temperature		
Operating temperature range		+5 °C to +50 °C
Permissible temperature range		0 °C to +55 °C
Storage temperature range		-40 °C to +70 °C
Climatic loading	without condensation	+40 °C at 90 % rel. humidity, in line with EN 60068-2-30

Altitude		
Maximum operating altitude	above sea level	4600 m (approx. 15100 ft)

Mechanical resistance		
Vibration	sinusoidal	5 Hz to 55 Hz, displacement: 0.15 mm constant, amplitude (1.8 g at 55 Hz), 55 Hz to 150 Hz, acceleration: 0.5 g constant, in line with EN 60068-2-6
	random	8 Hz to 500 Hz, acceleration 1.2 g (RMS), in line with EN 60068-2-64
Shock		40 g shock spectrum, in line with MIL-STD-810E, method no. 516.4, procedure I, MIL-PRF-28800F, class 3

Product conformity		
EMC		in line with: <ul style="list-style-type: none"> • IEC/EN 61326-1 ^{10, 11} • CISPR 11/EN 55011 ¹⁰
EU legislation	for details, see user documentation	EU: in line with Data Act – Regulation (EU) 2023/2854

Recommended calibration interval		1 year
---	--	--------

Power supply		
Input voltage range	AC	100 V to 240 V ± 10 %
Supply frequency	AC	50 Hz to 60 Hz/400 Hz ± 5 %
Maximum input current		7.3 A to 4.6 A (100 V to 240 V)
Power consumption	R&S®FSWP8	
	with minimum options	200 W
	with all options	250 W (meas.)
	R&S®FSWP26	
	with minimum options	225 W
	with all options	275 W (meas.)
Electrical safety	R&S®FSWP50	
	with minimum options	250 W
	with all options	300 W (meas.)
International safety approvals		in line with: <ul style="list-style-type: none"> • IEC 61010-1 • EN 61010-1 • UL 61010-1 • CAN/CSA-C22.2 No. 61010-1 VDE, CE, cCSA _{US} , KCC

Dimensions and weight		
Dimensions (nom.)	W × H × D, including front handles and rear feet	462 mm × 240 mm × 504 mm (18.15 in × 9.44 in × 19.81 in)
Net weight (nom.)	R&S®FSWP8	
	with minimum options	20.6 kg (45.4 lb)
	with all options	22 kg (48.5 lb)
	R&S®FSWP26, with all options	24 kg (52.9 lb)
	R&S®FSWP50, with all options	24.5 kg (54 lb)

¹⁰ Emission limits for class A equipment.

¹¹ Immunity test requirement for industrial environment (EN 61326 table 2).

Options

R&S®FSWP-B1 spectrum analyzer


The following specifications apply for operation of the R&S®FSWP in spectrum analyzer mode unless otherwise stated.

Frequency

Frequency range	R&S®FSWP8	
	DC coupled	10 Hz to 8 GHz
	AC coupled	10 MHz to 8 GHz
	R&S®FSWP26	
	DC coupled	10 Hz to 26.5 GHz
	AC coupled	10 MHz to 26.5 GHz
	R&S®FSWP50	
	DC coupled	10 Hz to 50 GHz
	AC coupled	10 MHz to 50 GHz
	R&S®FSWP50 with R&S®FSWP-B56G option	
DC coupled	1 MHz to 56 GHz	
AC coupled	10 MHz to 56 GHz	
Frequency resolution	0.01 Hz	

Frequency readout		
Marker resolution		1 Hz
Uncertainty		$\pm(\text{marker frequency} \times \text{reference accuracy} + 10 \% \times \text{resolution bandwidth} + \frac{1}{2}(\text{span} / (\text{sweep points} - 1)) + 1 \text{ Hz})$
Number of sweep (trace) points	default value	1001
	range	101 to 100001
Marker tuning frequency step size	marker step size = sweep points	span / (sweep points - 1)
	marker step size = standard	span / (default sweep points - 1)
Frequency counter resolution		0.001 Hz
Count accuracy		$\pm(\text{frequency} \times \text{reference accuracy} + \frac{1}{2} \text{ (last digit)})$
Display range for frequency axis		0 Hz, 10 Hz to max. frequency
Resolution		0.1 Hz
Maximum span deviation		$\pm 0.1 \%$

Spectral purity		
SSB phase noise	frequency = 1000 MHz, carrier offset	
	10 Hz, without R&S®FSWP-B4 option	-80 dBc (1 Hz) (nom.)
	10 Hz, with R&S®FSWP-B4 option	-95 dBc (1 Hz) (nom.)
	100 Hz	-106 dBc (1 Hz), typ. -112 dBc (1 Hz)
	1 kHz	< -125 dBc (1 Hz), typ. -130 dBc (1 Hz)
	10 kHz	< -134 dBc (1 Hz), typ. -138 dBc (1 Hz)
	100 kHz	< -136 dBc (1 Hz), typ. -140 dBc (1 Hz)
	1 MHz	< -145 dBc (1 Hz), typ. -149 dBc (1 Hz)
	10 MHz	-156 dBc (1 Hz) (nom.)
Residual FM	frequency = 1000 MHz, RBW = 1 kHz, sweep time = 100 ms	< 0.1 Hz (nom.)

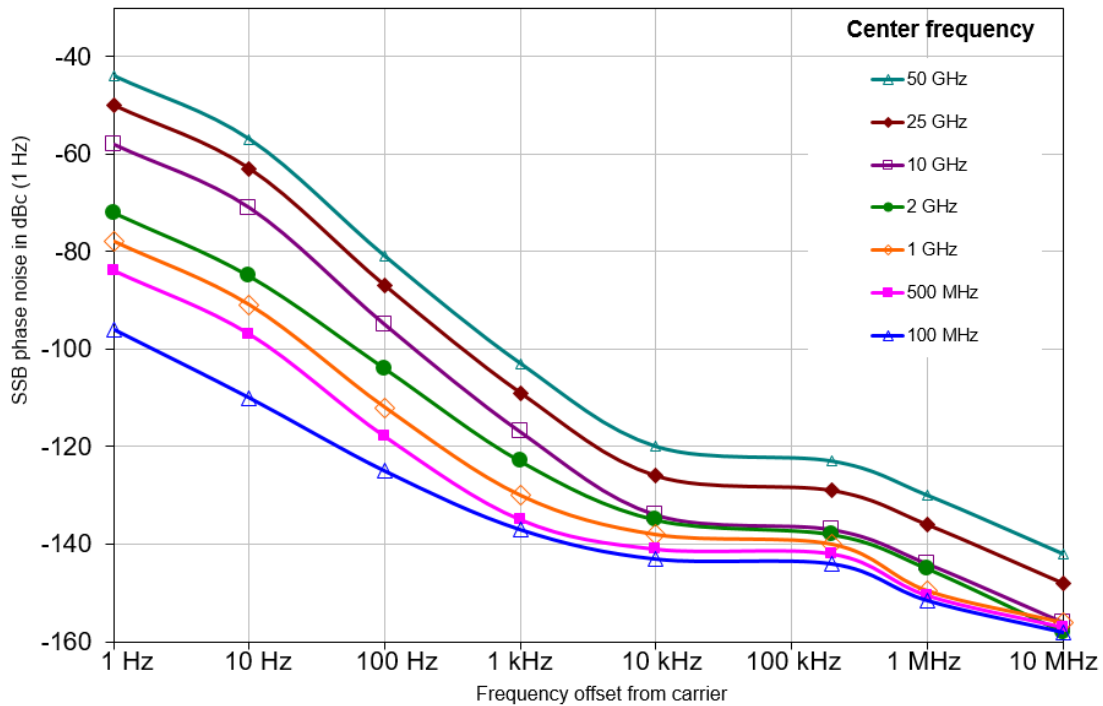

Typical phase noise at different center frequencies in spectrum analyzer mode (with R&S®FSWP-B4 option for offsets ≤ 10 Hz)

Sweep time

Sweep time range	span = 0 Hz	1 μ s to 16000 s
	span ≥ 10 Hz	3 μ s to 16000 s ¹²
Sweep time accuracy	span = 0 Hz, sweep points ≤ 10001	± 0.1 % (nom.)
	span ≥ 10 Hz	± 3 % (nom.)

Resolution bandwidths

Sweep filters and FFT filters		
Resolution bandwidths (-3 dB)		1 Hz to 10 MHz in 1/2/3/5 sequence, 3.9 kHz, 6.25 kHz additionally
	with R&S®FSWP-B8E option	20 MHz, 40 MHz additionally
	with R&S®FSWP-B8 option	20 MHz, 40 MHz, 50 MHz, 80 MHz additionally
Bandwidth uncertainty		< 3 % (nom.)
Shape factor 60 dB:3 dB		< 5 (nom.)

Video bandwidths	standard	1 Hz to 10 MHz in 1/2/3/5 sequence
	with R&S®FSWP-B8E option	20 MHz, 40 MHz additionally ¹³
	with R&S®FSWP-B8 option	20 MHz, 40 MHz, 50 MHz,
		80 MHz additionally ¹³

Signal analysis bandwidth	standard	10 MHz (nom.)
	with R&S®FSWP-B80 option	80 MHz (nom.)

¹² The selected sweep time is the net data acquisition time (without the extra time needed for hardware settling or FFT processing).

¹³ For video bandwidth settings > 20 MHz, the video bandwidth filter is bypassed.

Level

Level display		
Display range		displayed noise floor up to +30 dBm
Logarithmic level axis		1 dB to 200 dB, in steps of 1/2/5
Linear level axis		10 % of reference level per level division, 10 divisions or logarithmic scaling
Number of traces		6
Trace detector		max. peak, min. peak, auto peak (normal), sample, RMS, average
Trace functions		clear/write, max. hold, min. hold, average, view
Setting range of reference level		-130 dBm to (-10 dBm + RF attenuation - RF preamplifier gain), in steps of 0.01 dB
Units of level axis	logarithmic level display	dBm, dB μ V, dBmV, dB μ A, dBpW
	linear level display	μ V, mV, μ A, mA, pW, nW

Intermodulation

1 dB compression of input mixer (two tone)	RF attenuation = 0 dB, RF preamplifier off	
	$f_{in} \leq 3$ GHz	+15 dBm (nom.)
	3 GHz < $f_{in} \leq 8$ GHz	+10 dBm (nom.)
	$f_{in} > 8$ GHz	+7 dBm (nom.)
	with R&S®FSWP-B24 option, RF attenuation = 0 dB, RF preamplifier on	
	$f_{in} \leq 3$ GHz	-13 dBm (nom.)
	3 GHz < $f_{in} \leq 8$ GHz	-20 dBm (nom.)
Third order intercept point (TOI)	$f_{in} > 8$ GHz	-23 dBm (nom.)
	RF attenuation = 0 dB, level = -15 dBm (both), $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier off	
	$f_{in} < 10$ MHz	28 dBm (meas.)
	10 MHz $\leq f_{in} < 1$ GHz	> 25 dBm, typ. 30 dBm
	1 GHz $\leq f_{in} < 3$ GHz	> 20 dBm, typ. 25 dBm ¹⁴
	3 GHz $\leq f_{in} < 8$ GHz	> 17 dBm, typ. 20 dBm
	8 GHz $\leq f_{in} < 10$ GHz	> 8 dBm
	10 GHz $\leq f_{in} \leq 50$ GHz	> 10 dBm
	R&S®FSWP8, R&S®FSWP26 with R&S®FSWP-B24 option, RF attenuation = 0 dB, level = -50 dBm (both), $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier on	
	10 MHz $\leq f_{in} < 1$ GHz	-10 dBm (meas.)
	1 GHz $\leq f_{in} < 8$ GHz	-13 dBm (meas.)
	8 GHz $\leq f_{in} \leq 26.5$ GHz	-15 dBm (meas.)
	R&S®FSWP50 with R&S®FSWP-B24 option, RF attenuation = 0 dB, level = -55 dBm (both), $\Delta f > 5 \times$ RBW, YIG preselector on, RF preamplifier on	
	10 MHz $\leq f_{in} < 1$ GHz	-5 dBm (meas.)
	1 GHz $\leq f_{in} < 4$ GHz	-10 dBm (meas.)
$f_{in} > 4$ GHz	-20 dBm (meas.)	
Second harmonic intercept point (SHI)	RF attenuation = 0 dB, level = -5 dBm, YIG preselector on, RF preamplifier off	
	1 MHz < $f_{in} \leq 500$ MHz	45 dBm (meas.)
	500 MHz < $f_{in} < 1.5$ GHz ¹⁵	> 47 dBm, typ. 56 dBm
	500 MHz < $f_{in} < 1.5$ GHz ¹⁶	> 52 dBm, typ. 60 dBm
	1.5 GHz $\leq f_{in} \leq 4$ GHz	> 62 dBm, typ. 70 dBm
	4 GHz < $f_{in} \leq 25$ GHz	65 dBm (meas.)
	with R&S®FSWP-B24 option, RF attenuation = 0 dB, level = -50 dBm, YIG preselector on, RF preamplifier on	
	50 MHz < $f_{in} \leq 21.75$ GHz	10 dBm (meas.)

¹⁴ With R&S®FSWP-B13 highpass filter option, highpass off. With highpass on, the TOI degrades by 5 dB (nom.).

¹⁵ Without R&S®FSWP-B13 highpass filter option or highpass off.

¹⁶ With R&S®FSWP-B13 highpass filter option, highpass on.

Sensitivity

All noise level data in this section not marked as typical (typ.) or nominal (nom.) are specified values whose compliance is ensured by testing.

Displayed average noise level		
RF preamplifier off	RF attenuation = 0 dB, termination = 50 Ω , normalized to 1 Hz RBW, trace average, average mode log, sample detector, +5 °C to +40 °C	
	10 Hz $\leq f \leq$ 100 Hz	-110 dBm
	100 Hz $< f \leq$ 1 kHz	-120 dBm
	1 kHz $< f <$ 9 kHz	-135 dBm
	RF attenuation = 0 dB, termination = 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on for $f \leq$ 50 GHz, YIG preselector off for $f >$ 50 GHz	
	9 kHz $\leq f \leq$ 1 MHz	-145 dBm
	1 MHz $< f \leq$ 1 GHz	-149 dBm
	1 GHz $< f <$ 3 GHz ¹⁷	-150 dBm
	1 GHz $< f <$ 3 GHz ¹⁸	-153 dBm
	3 GHz $\leq f <$ 8 GHz	-150 dBm
	8 GHz $\leq f <$ 13.6 GHz	-148 dBm
	13.6 GHz $\leq f <$ 18 GHz	-147 dBm
	18 GHz $\leq f <$ 25 GHz	-145 dBm
	25 GHz $\leq f \leq$ 34 GHz	-140 dBm
	34 GHz $< f \leq$ 40 GHz	-137 dBm
	40 GHz $< f \leq$ 43.5 GHz	-135 dBm
	43.5 GHz $< f \leq$ 47 GHz	-133 dBm
47 GHz $< f \leq$ 49 GHz	-131 dBm	
49 GHz $< f \leq$ 54 GHz	-129 dBm	
54 GHz $< f \leq$ 56 GHz	-120 dBm	
R&S®FSWP8 or R&S®FSWP26 with R&S®FSWP-B24 option and RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on	
	10 MHz $< f \leq$ 60 MHz	-160 dBm
	60 MHz $< f \leq$ 3 GHz	-165 dBm
	3 GHz $< f \leq$ 8 GHz	-162 dBm
	8 GHz $< f \leq$ 18 GHz	-162 dBm
	18 GHz $< f \leq$ 23 GHz	-160 dBm
23 GHz $< f \leq$ 26.5 GHz	-156 dBm	
R&S®FSWP50 with R&S®FSWP-B24 option and RF preamplifier = 30 dB	RF attenuation = 0 dB, termination = 50 Ω , log. scaling, normalized to 1 Hz RBW, RBW = 1 kHz, VBW = 1 Hz, +5 °C to +40 °C, YIG preselector on for $f \leq$ 50 GHz, YIG preselector off for $f >$ 50 GHz	
	10 MHz $< f \leq$ 60 MHz	-160 dBm
	60 MHz $< f \leq$ 3 GHz	-165 dBm
	3 GHz $< f \leq$ 8 GHz	-160 dBm
	8 GHz $< f \leq$ 18 GHz	-162 dBm
	18 GHz $< f \leq$ 23 GHz	-160 dBm
	23 GHz $< f \leq$ 40 GHz	-156 dBm
	40 GHz $< f \leq$ 43 GHz	-152 dBm
	43 GHz $< f \leq$ 53 GHz	-146 dBm
53 GHz $< f \leq$ 56 GHz	-132 dBm	
Improvement with noise cancellation	for noise-like signals	
	100 kHz $< f \leq$ 43 GHz	13 dB (nom.)
	43 GHz $< f \leq$ 56 GHz	0 dB (nom.)

¹⁷ Without R&S®FSWP-B13 highpass filter option or highpass off.

¹⁸ With R&S®FSWP-B13 highpass filter option, highpass on.

Spurious responses

Spurious responses	YIG preselector on for $f \geq 8$ GHz, mixer level ≤ -10 dBm ¹⁹ , $f \leq 50$ GHz sweep type: auto, sweep optimization: auto or dynamic	
Image response	$f_{in} - 2 \times 8997$ MHz (1st IF)	< -90 dBc
	$f_{in} - 2 \times 1317$ MHz (2nd IF)	< -90 dBc
	$f_{in} - 2 \times 37$ MHz (3rd IF)	< -90 dBc
	f_{in} = external interfering signal frequency	
Intermediate frequency response	f_{in} = 1st IF (8997 MHz)	< -90 dBc
	f_{in} = 2nd IF (1317 MHz)	< -90 dBc
	f_{in} = 3rd IF (37 MHz)	< -90 dBc
	f_{in} = external interfering signal frequency	
Residual spurious response	RF attenuation = 0 dB, signal source of R&S®FSWP-B64 option (additive phase noise measurements) turned off	
	$f \leq 1$ MHz	< -90 dBm
	1 MHz < $f \leq 8900$ MHz	< -110 dBm
	8900 MHz < $f \leq 26.5$ GHz	< -100 dBm
	26.5 GHz < $f \leq 50$ GHz	< -100 dBm (nom.)
f = receive frequency		
Local oscillators related spurious	signal source of R&S®FSWP-B64 option (additive phase noise measurements) turned off	
	$f_{in} < 1$ GHz	
	10 Hz \leq offset from carrier < 200 Hz	< -90 dBc
	offset from carrier > 200 Hz	< -100 dBc
	$f_{in} \geq 1$ GHz	
	10 Hz \leq offset from carrier < 200 Hz	< -90 dBc + 20 log(f_{in} /GHz)
offset from carrier > 200 Hz	< -100 dBc + 20 log(f_{in} /GHz)	
Vibrational environmental stimuli	max. 0.21 g (RMS)	
		< -60 dBc + 20 log(f_{in} /GHz) (nom.)

Level measurement uncertainty

Absolute level uncertainty	RBW = 10 kHz, level = -10 dBm, reference level = -10 dBm, RF attenuation = 10 dB	
	$f = 64$ MHz	< 0.2 dB ($\sigma = 0.07$ dB)
Frequency response, referenced to 64 MHz, YIG preselector on	RF attenuation = 10/20/30/40 dB, RF preamplifier off, +20 °C to +30 °C	
	10 Hz $\leq f < 9$ kHz	< 1 dB (nom.)
	9 kHz $\leq f < 10$ MHz	< 0.45 dB ($\sigma = 0.17$ dB)
	10 MHz $\leq f < 3.6$ GHz	< 0.3 dB ($\sigma = 0.10$ dB)
	3.6 GHz $\leq f \leq 8$ GHz	< 0.5 dB ($\sigma = 0.17$ dB)
	8 GHz < $f < 22$ GHz, span < 1 GHz	< 1.5 dB ($\sigma = 0.50$ dB)
	22 GHz $\leq f \leq 26.5$ GHz, span < 1 GHz	< 2 dB ($\sigma = 0.67$ dB)
	26.5 GHz < $f \leq 50$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.83$ dB)
	any RF attenuation, +15 °C to +40 °C	
	10 Hz $\leq f < 9$ kHz	< 1 dB (nom.)
	9 kHz $\leq f < 3.6$ GHz	< 0.6 dB ($\sigma = 0.20$ dB)
	3.6 GHz $\leq f \leq 8$ GHz	< 0.8 dB ($\sigma = 0.27$ dB)
	8 GHz < $f < 22$ GHz, span < 1 GHz	< 2 dB ($\sigma = 0.67$ dB)
	22 GHz $\leq f \leq 26.5$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.83$ dB)
	26.5 GHz < $f \leq 50$ GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)
	RF attenuation ≤ 20 dB, RF preamplifier on, +20 °C to +30 °C	
	10 MHz $\leq f < 3.6$ GHz	< 0.6 dB ($\sigma = 0.2$ dB)
	3.6 GHz $\leq f \leq 8$ GHz	< 0.8 dB ($\sigma = 0.27$ dB)
	8 GHz < $f < 22$ GHz, span < 1 GHz	< 2 dB ($\sigma = 0.67$ dB)
22 GHz $\leq f \leq 26.5$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.83$ dB)	
26.5 GHz < $f \leq 50$ GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)	
Frequency response, referenced to 64 MHz, YIG preselector off	RF attenuation = 10/20/30/40 dB, RF preamplifier off, +20 °C to +30 °C	
	$f < 8$ GHz	same values as with preselector on
	8 GHz $\leq f < 22$ GHz	< 1.5 dB ($\sigma = 0.5$ dB)
	22 GHz $\leq f \leq 26.5$ GHz	< 2 dB ($\sigma = 0.6$ dB)
	26.5 GHz < $f \leq 56$ GHz, span < 1 GHz	< 2.5 dB ($\sigma = 0.83$ dB)
	any RF attenuation, +15 °C to +40 °C	
	$f < 8$ GHz	same values as with preselector on
	8 GHz $\leq f < 22$ GHz	< 2 dB ($\sigma = 0.6$ dB)
	22 GHz $\leq f \leq 26.5$ GHz	< 2.5 dB ($\sigma = 0.75$ dB)
26.5 GHz < $f \leq 56$ GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)	

¹⁹ Mixer level = signal level – RF attenuation + preamplifier gain.

Frequency response referenced to 64 MHz, YIG preselector off (continued)	RF attenuation ≤ 20 dB, RF preamplifier on, $+20$ °C to $+30$ °C	
	$f < 8$ GHz	same values as with preselector on
	$8 \text{ GHz} \leq f < 22$ GHz	< 2 dB ($\sigma = 0.6$ dB)
	$22 \text{ GHz} \leq f \leq 26.5$ GHz	< 2.5 dB ($\sigma = 0.75$ dB)
	$26.5 \text{ GHz} < f \leq 56$ GHz, span < 1 GHz	< 3 dB ($\sigma = 1.0$ dB)
Attenuator switching uncertainty	$f = 64$ MHz, 0 dB to 70 dB, referenced to 10 dB attenuation	< 0.2 dB ($\sigma = 0.07$ dB)
Uncertainty of reference level setting	input mixer level ≤ -15 dBm	0 dB ²⁰
	input mixer level > -15 dBm	< 0.1 dB (nom.)
Bandwidth switching uncertainty	referenced to RBW = 10 kHz, $f = 64$ MHz	< 0.2 dB ($\sigma = 0.08$ dB)

Nonlinearity of displayed level		
Logarithmic level display	S/N > 16 dB, 0 dB \leq level ≤ -70 dB	< 0.1 dB ($\sigma = 0.04$ dB)
	S/N > 16 dB, -70 dB $<$ level ≤ -90 dB	< 0.2 dB ($\sigma = 0.08$ dB)
Linear level display	S/N > 16 dB, 0 dB to -70 dB	< 5 % of reference level (nom.)

Total measurement uncertainty		
YIG preselector on	signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10/20/30/40 dB, RF preamplifier off, span/RBW < 100 , 95 % confidence level, $+20$ °C to $+30$ °C	
	$9 \text{ kHz} \leq f \leq 10$ MHz	± 0.37 dB
	$10 \text{ MHz} < f \leq 3.6$ GHz	± 0.27 dB
	$3.6 \text{ GHz} < f \leq 8$ GHz	± 0.37 dB
	$8 \text{ GHz} < f \leq 22$ GHz	± 1.4 dB
	$22 \text{ GHz} < f \leq 26.5$ GHz	± 1.7 dB
YIG preselector off	signal level = 0 dB to -70 dB below reference level, S/N > 20 dB, sweep time = auto, RF attenuation = 10/20/30/40 dB, RF preamplifier off, span/RBW < 100 , 95 % confidence level, $+20$ °C to $+30$ °C	
	$8 \text{ GHz} \leq f \leq 22$ GHz	± 1.0 dB
	$22 \text{ GHz} < f \leq 26.5$ GHz	± 1.2 dB
	$26.5 \text{ GHz} < f \leq 50$ GHz	± 1.7 dB
	$50 \text{ GHz} < f \leq 56$ GHz	± 2.5 dB

Trigger functions

Trigger		
Trigger source	spectrum analysis	free run, video, external, IF power, RF power
Trigger offset	span ≥ 10 Hz	5 ns to 20 s
	span = 0 Hz	(–sweep time) to 20 s
Minimum trigger offset resolution	span > 0 Hz	5 ns
	span = 0 Hz, trigger offset > 0	5 ns
	span = 0 Hz, trigger offset < 0	sweep time / number of sweep points
Maximum deviation of trigger offset		5 ns
IF power trigger		
Sensitivity	minimum signal power	-60 dBm + RF attenuation – RF preamplifier gain (nom.)
	maximum signal power	-10 dBm + RF attenuation – RF preamplifier gain (nom.)
IF power trigger bandwidth	RBW > 500 kHz	20 MHz (nom.) ²¹
	RBW ≤ 500 kHz, FFT	20 MHz (nom.)
	RBW ≤ 500 kHz, swept	6 MHz (nom.)
RF power trigger		
Sensitivity	minimum signal power	-30 dBm + RF attenuation – RF preamplifier gain (nom.)
	maximum signal power	$+10$ dBm + RF attenuation – RF preamplifier gain (nom.)
RF power trigger frequency range	$f \leq 8$ GHz	8 GHz (nom.)
	$f > 8$ GHz	center frequency ± 250 MHz (nom.) ²²

²⁰ The reference level setting affects only the graphical representation of the measurement result on the display, not the measurement itself.

The reference level setting causes no additional uncertainty in measurement results.

²¹ Sweep optimization = auto.

²² YIG preselector off for $f \geq 8$ GHz.

Gated sweep		
Gate source		video, external, IF power, RF power
Gate delay		5 ns to 20 s, min. resolution 5 ns
Gate length		5 ns to 20 s, min. resolution 5 ns
Maximum deviation of gate length		±5 ns

I/Q data (R&S®FSWP-B1 option required)

Memory length		max. 440 Msample I and Q
Word length of I/Q samples	sampling rate > 100 MHz or number of samples > 300 Msample otherwise	18 bit 24 bit
Sampling rate	standard with R&S®FSWP-B80 option with R&S®FSWP-B320 option	100 Hz to 200 MHz 100 Hz to 200 MHz 100 Hz to 1 GHz
Maximum signal analysis bandwidth (equalized)	standard with R&S®FSWP-B80 option with R&S®FSWP-B320 option	10 MHz 80 MHz (nom.) ²³ 320 MHz (nom.) ²³

Signal analysis bandwidth ≤ 80 MHz

Amplitude flatness	(1.25 × signal analysis bandwidth) ≤ $f_{\text{center}} < 8$ GHz $f_{\text{center}} \geq 8$ GHz, YIG preselector off	±0.3 dB (nom.) ±0.5 dB (nom.)
Deviation from linear phase	(1.25 × signal analysis bandwidth) ≤ $f_{\text{center}} < 8$ GHz $f_{\text{center}} \geq 8$ GHz, YIG preselector off	±1° (nom.) ±2° (nom.)
Level display nonlinearity		see section Nonlinearity of displayed level
Level measurement uncertainty		see section Total measurement uncertainty, YIG preselector: off
Third order intermodulation distortion		see section Third order intercept point (TOI)
ADC related spurious response	mixer level = -30 dBm ²⁴ analysis bandwidth < 17 MHz 17 MHz ≤ analysis bandwidth < 80 MHz	-100 dBc (nom.) -80 dBc (nom.)
Other spurious responses		see section Spurious responses

Signal analysis bandwidth 80 MHz to 160 MHz

Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, YIG preselector off for $f \geq 8$ GHz 150 MHz ≤ $f_{\text{center}} < 4$ GHz 4 GHz ≤ $f_{\text{center}} < 8$ GHz 8 GHz ≤ $f_{\text{center}} < 26.5$ GHz 26.5 GHz ≤ $f_{\text{center}} \leq 50$ GHz	±0.5 dB (nom.) ±0.7 dB (nom.) ±1 dB (nom.) ±2 dB (nom.)
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, YIG preselector off for $f \geq 8$ GHz 150 MHz ≤ $f_{\text{center}} < 4$ GHz 4 GHz ≤ $f_{\text{center}} < 8$ GHz 8 GHz ≤ $f_{\text{center}} < 26.5$ GHz 26.5 GHz ≤ $f_{\text{center}} < 43.5$ GHz 43.5 GHz ≤ $f_{\text{center}} \leq 50$ GHz	±1° (nom.) ±2° (nom.) ±2.5° (nom.) ±4° (nom.) ±8° (nom.)
Nonlinearity of displayed level	0 dB to -70 dB	< 0.15 dB (nom.)
Level measurement uncertainty at center frequency		add 0.2 dB (nom.) to the values in section Total measurement uncertainty, YIG preselector off

²³ YIG preselector off for $f \geq 8$ GHz.²⁴ Level of a tone at the input mixer (also abbreviated as mixer level) = signal level – RF attenuation + preamplifier gain.

Third order intermodulation distortion	reference level = signal level + 6 dB	
	150 MHz $\leq f_{\text{center}} < 8$ GHz: two -20 dBm tones at input mixer within analysis bandwidth ²⁴ , $f_{\text{center}} \geq 8$ GHz: two -30 dBm tones at input mixer within analysis bandwidth ²⁴	-75 dBc (nom.)
Residual spurious response	RF attenuation 0 dB, $f_{\text{center}} \geq 150$ MHz	-90 dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = -10 dBm ²⁴ , reference level = signal level, $f_{\text{center}} \geq 150$ MHz	-78 dBc (nom.)
Other spurious responses		see section Spurious responses

Signal analysis bandwidth 160 MHz to 320 MHz

Amplitude flatness	RF attenuation = 10/20/30/40 dB, RF preamplifier off, YIG preselector off for $f \geq 8$ GHz	
	200 MHz $\leq f_{\text{center}} < 4$ GHz	± 0.7 dB (nom.)
	4 GHz $\leq f_{\text{center}} < 7$ GHz	± 1.2 dB (nom.)
	7 GHz $\leq f_{\text{center}} < 8$ GHz ²⁵	± 1.4 dB (nom.)
	8 GHz $\leq f_{\text{center}} < 22$ GHz	± 1.6 dB (nom.)
	22 GHz $\leq f_{\text{center}} \leq 43.5$ GHz	± 2 dB (nom.)
	43.5 GHz $< f_{\text{center}} \leq 50$ GHz	± 2.5 dB (nom.)
Deviation from linear phase	RF attenuation = 10/20/30/40 dB, RF preamplifier off, YIG preselector off for $f \geq 8$ GHz	
	200 MHz $\leq f_{\text{center}} < 4$ GHz	$\pm 2.5^\circ$ (nom.)
	4 GHz $\leq f_{\text{center}} < 8$ GHz ²⁵	$\pm 4^\circ$ (nom.)
	8 GHz $\leq f_{\text{center}} < 43.5$ GHz	$\pm 5^\circ$ (nom.)
	43.5 GHz $\leq f_{\text{center}} \leq 50$ GHz	$\pm 8^\circ$ (nom.)
Nonlinearity of displayed level	0 dB to -70 dB	< 0.15 dB (nom.)
Level measurement uncertainty at center frequency		add 0.2 dB (nom.) to the values in section Total measurement uncertainty, YIG preselector off
Third order intermodulation distortion	reference level = signal level + 6 dB	
	200 MHz $\leq f_{\text{center}} < 8$ GHz: two -20 dBm tones at input mixer within analysis bandwidth ²⁴ , $f_{\text{center}} \geq 8$ GHz: two -30 dBm tones at input mixer within analysis bandwidth ²⁴	-75 dBc (nom.)
Residual spurious response	RF attenuation 0 dB, $f_{\text{center}} \geq 200$ MHz	-90 dBm (nom.)
ADC related spurious response	single tone within analysis bandwidth, mixer level = -10 dBm ²⁴ , reference level = signal level	
	200 MHz $\leq f_{\text{center}} \leq 460$ MHz	-70 dBc (nom.)
	$f_{\text{center}} > 460$ MHz	-72 dBc (nom.)
Other spurious responses		see section Spurious responses

²⁵ To obtain the set analysis bandwidth, $(f_{\text{center}} + \frac{1}{2} \text{analysis bandwidth}) \leq 8$ GHz must be met.

R&S®FSWP-B13 highpass filters (R&S®FSWP-B1 option required)

Frequency		
Frequency range	filter 1	1 GHz to 1.75 GHz
	filter 2	1.75 GHz to 3 GHz

Stopband attenuation		
500 MHz to 875 MHz	filter 1	> 20 dB (nom.)
875 MHz to 1.5 GHz	filter 2	> 20 dB (nom.)

Other specifications		
Level measurement uncertainty		see section R&S®FSWP-B1 spectrum analyzer
Displayed average noise level		
Intermodulation		
Measurement uncertainty		

**R&S®FSWP-B21 LO/IF connections for external mixers
(for R&S®FSWP26/R&S®FSWP50)**

LO signal		
Frequency range		7.65 GHz to 16 GHz
Level	+20 °C to +30 °C	+15.5 dBm ± 1.5 dB
	+5 °C to +40 °C	+15.5 dBm ± 3 dB

IF input		
IF frequency	set signal analysis bandwidth ≤ 80 MHz, bandwidth-dependent	1310 MHz to 1330 MHz
Full-scale level	compression < 1 dB	
	2-port mixer (LO output/IF input, front panel)	-20 dBm (nom.)
	3-port mixer (IF input, front panel)	-20 dBm (nom.)
Level uncertainty at IF frequency	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 2-port mixer, LO output/IF input connector (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB
	IF input level = reference level = -25 dBm, RBW = 30 kHz, mixer conversion loss set to 0 dB, 3-port mixer, IF input connector (front panel)	
	+20 °C to +30 °C	< 1 dB
	+5 °C to +40 °C	< 3 dB

Inputs and outputs		
LO output/IF input		SMA female, 50 Ω
IF input		SMA female, 50 Ω

Phase noise sensitivity with two external mixers in cross-correlation mode (R&S®FSWP-B60/R&S®FSWP-B61 and R&S®FSWP-B64 options required)

With R&S®FSWP-B61 and R&S®FSWP-B64 option:

Start offset 1 Hz, cross-correlation factor = 1, frequency reference internal, internal reference loop bandwidth 30 Hz, signal level = 0 dBm, specified values in dBc (1 Hz), for typical values subtract 6 dB

RF input frequency	Supported mixer	Offset frequency from the carrier								
		1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	≥ 30 MHz
50 GHz to 75 GHz	R&S®FS-Z75	-34	-53	-82	-115	-134	-135	-139	-145	-145
60 GHz to 90 GHz	R&S®FS-Z90	-33	-52	-81	-114	-133	-134	-138	-144	-144
75 GHz to 110 GHz	R&S®FS-Z110	-31	-50	-79	-112	-131	-132	-136	-142	-142

With R&S®FSWP-B60 and R&S®FSWP-B64 option:

Start offset 1 Hz, cross-correlation factor = 1, frequency reference internal, internal reference loop bandwidth 30 Hz, signal level = 0 dBm, specified values in dBc (1 Hz), for typical values subtract 6 dB

RF input frequency	Supported mixer	Offset frequency from the carrier								
		1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	≥ 30 MHz
50 GHz to 75 GHz	R&S®FS-Z75	-18	-46	-78	-110	-129	-132	-137	-145	-144
60 GHz to 90 GHz	R&S®FS-Z90	-17	-45	-77	-109	-128	-131	-136	-144	-143
75 GHz to 110 GHz	R&S®FS-Z110	-15	-43	-75	-107	-126	-129	-134	-142	-141

R&S®FSWP-B4 option improves the phase noise sensitivity at 1 Hz offset by 5 dB (nom.).

At other offsets the above specification applies.

Improvement of phase noise sensitivity by number of cross-correlations

Cross-correlations	10	100	1000	10 000
Improvement	5 dB	10 dB	15 dB	20 dB

Phase noise sensitivity with one external mixer, with R&S®FSWP-B4 or R&S®FSWP-B61 option

Start offset 1 Hz, frequency reference internal, signal level > -10 dBm, nominal values in dBc (1 Hz)

RF input frequency	Supported mixer	Offset frequency from the carrier								
		1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	≥ 30 MHz
50 GHz to 75 GHz	R&S®FS-Z75	-32	-50	-75	-97	-114	-116	-124	-135	-137
60 GHz to 90 GHz	R&S®FS-Z90	-31	-49	-74	-96	-113	-115	-123	-133	-135
75 GHz to 110 GHz	R&S®FS-Z110	-29	-47	-72	-94	-111	-113	-121	-131	-133

Phase noise sensitivity with one external mixer, without R&S®FSWP-B4 or R&S®FSWP-B61 option

Start offset 1 Hz, frequency reference internal, signal level > -10 dBm, nominal values in dBc (1 Hz)

RF input frequency	Supported mixer	Offset frequency from the carrier								
		1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz	≥ 30 MHz
50 GHz to 75 GHz	R&S®FS-Z75	-23	-45	-75	-97	-114	-116	-124	-135	-137
60 GHz to 90 GHz	R&S®FS-Z90	-22	-44	-74	-96	-113	-115	-123	-133	-135
75 GHz to 110 GHz	R&S®FS-Z110	-20	-42	-72	-94	-111	-113	-121	-131	-133

R&S®FSWP-B24 RF preamplifier (R&S®FSWP-B1 option required)

Frequency		
Frequency range	R&S®FSWP8	100 kHz to 8 GHz
	R&S®FSWP26	100 kHz to 26.5 GHz
	R&S®FSWP50	100 kHz to 50 GHz

Setting range		
RF preamplifier gain	selectable	15 dB/30 dB (nom.)

Other specifications		
Level measurement uncertainty		See specifications in section R&S®FSWP-B1 spectrum analyzer; the RF preamplifier has no effect on phase noise analyzer specifications.
Displayed average noise level		
Intermodulation		
Measurement uncertainty		

R&S®FSWP-B64 additive phase noise measurements

Additive phase noise measurements with internal signal source ²⁶

Frequency range	R&S®FSWP8	9.95 MHz to 8 GHz
	R&S®FSWP26	9.95 MHz to 18 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .27	9.95 MHz to 18 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51	100 MHz to 50 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51 and R&S®FSWP-B56G	100 MHz to 54 GHz
Signal source output connector	R&S®FSWP8	N female
	R&S®FSWP26	N female
	R&S®FSWP50 with R&S®FSWP-B64 option, model .27	N female
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51	1.85 mm male (compatible with 2.4 mm)
LO auxiliary output connector	R&S®FSWP50 with R&S®FSWP-B64 option, model .51	1.85 mm female (compatible with 2.4 mm)
LO auxiliary input connector	R&S®FSWP8	SMA female
	R&S®FSWP26	SMA female
	R&S®FSWP50 with R&S®FSWP-B64 option, model .27	SMA female
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51	1.85 mm female (compatible with 2.4 mm)
Offset frequency range	input signal ≤ 100 MHz	1 μHz to 40 % of carrier frequency
	input signal > 100 MHz	1 μHz to 40 MHz
Measurement uncertainty		< 2 dB (nom.)
Input level measurement uncertainty	-20 dBm ≤ signal level ≤ +15 dBm, +20 °C to +30 °C	
	1 MHz ≤ signal frequency < 8 GHz	< 1.5 dB
	8 GHz ≤ signal frequency ≤ 18 GHz	< 2 dB

R&S®FSWP8, R&S®FSWP26, R&S®FSWP50 with R&S®FSWP-B64 option, model .27

Start offset 1 Hz, cross-correlation factor = 10, signal level ≥ 10 dBm, specified values in dBc (1 Hz), for typical values subtract 6 dB								
RF input frequency	Offset frequency from the carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	3 MHz
10 MHz	-106	-115	-128	-140	-148	-148	-148	-148
100 MHz	-118	-132	-143	-152	-155	-155	-155	-153
1 GHz	-115	-123	-137	-147	-160	-165	-165	-161
3 GHz	-115	-128	-143	-147	-165	-165	-160	-156
10 GHz	-85	-104	-120	-138	-148	-154	-164	-160
16 GHz	-82	-98	-120	-138	-148	-154	-164	-160

²⁶ The sensitivity with internal signal source is specified for RF connection electrically 40 cm longer than the connection between LO auxiliary output and LO auxiliary input. For a connection between LO auxiliary output and LO auxiliary input, the minimum LO drive level for both channels must be sufficient as specified for additive phase noise measurements with external signal source.

R&S®FSWP50 with R&S®FSWP-B64 option, model .51

Start offset 1 Hz, cross-correlation factor = 10, maximum signal source level ²⁷ , specified values in dBc (1 Hz), for typical values subtract 6 dB								
RF input frequency	Offset frequency from the carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	40 MHz
100 MHz	-118	-129	-139	-147	-150	-152	-155	-148
1 GHz	-115	-123	-137	-147	-160	-160	-160	-155
3 GHz	-115	-128	-143	-147	-157	-160	-160	-156
10 GHz	-85	-104	-120	-138	-148	-154	-164	-165
16 GHz	-82	-98	-120	-138	-148	-154	-164	-165
26.5 GHz	-85	-100	-115	-130	-145	-155	-165	-165
50 GHz	-80	-95	-115	-125	-140	-145	-150	-155
54 GHz	-70	-88	-100	-110	-125	-135	-141	-141

Additive AM noise sensitivity with internal signal source ²⁶**R&S®FSWP8, R&S®FSWP26, R&S®FSWP50 with R&S®FSWP-B64 option, model .27**

Start offset 1 Hz, cross-correlation factor = 10, signal level ≥ 10 dBm, nominal values in dBc (1 Hz)								
RF input frequency	Offset frequency from the carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	3 MHz
10 MHz	-90	-105	-118	-134	-144	-148	-154	
100 MHz	-103	-115	-124	-137	-148	-155	-160	-160
1 GHz	-110	-115	-128	-140	-148	-155	-160	-160
3 GHz	-110	-115	-128	-140	-148	-155	-160	-160
10 GHz	-90	-104	-112	-120	-130	-138	-146	-150
16 GHz	-85	-99	-107	-117	-125	-133	-142	-147

R&S®FSWP50 with R&S®FSWP-B64 option, model .51

Start offset 1 Hz, cross-correlation factor = 10, maximum signal source level ²⁷ , nominal values in dBc (1 Hz)								
RF input frequency	Offset frequency from the carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	40 MHz
100 MHz	-105	-117	-128	-137	-148	-155	-155	-160
1 GHz	-110	-120	-123	-144	-148	-155	-160	-165
3 GHz	-110	-120	-133	-144	-148	-155	-160	-165
10 GHz	-90	-104	-120	-135	-140	-140	-150	-170
16 GHz	-85	-100	-120	-136	-150	-158	-164	-170
26.5 GHz	-95	-107	-120	-136	-149	-155	-155	-170
50 GHz	-90	-103	-116	-129	-140	-140	-140	-160
54 GHz	-76	-89	-103	-117	-130	-135	-146	-146

Additive phase noise measurements with external signal source ²⁸

With R&S®FSWP-B64 option, the R&S®FSWP provides two auxiliary LO inputs to support the use of external signal sources. ²⁹ This allows additive phase noise measurements with two or three DUTs frequency translating or non-frequency translating.

Frequency range	R&S®FSWP8	100 MHz to 8 GHz
	R&S®FSWP26	100 MHz to 18 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .27	100 MHz to 18 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51	100 MHz to 50 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51 and R&S®FSWP-B56G	100 MHz to 56 GHz
Offset frequency range		10 mHz to 40 MHz
Measurement uncertainty		< 2 dB (nom.)
Required LO drive level per input	local oscillator set to external	
	100 MHz \leq signal frequency < 12 GHz	-5 dBm to +10 dBm (nom.)
	12 GHz \leq signal frequency < 16 GHz	0 dBm to +10 dBm (nom.)
	16 GHz \leq signal frequency \leq 18 GHz	+5 dBm to +13 dBm (nom.)
	18 GHz \leq signal frequency \leq 56 GHz	+10 dBm to +13 dBm (nom.)

²⁷ Set signal source level to maximum value, see table Output level range on page 30.

²⁸ Auxiliary LO inputs required.

²⁹ The auxiliary LO inputs are standard for instruments with R&S®FSWP-B64 option, starting from the following serial numbers:
R&S®FSWP8: 101236, R&S®FSWP26: 101222, R&S®FSWP50: 101167.

Additive phase noise sensitivity with external signal source ²⁸

Start offset 1 Hz, cross-correlation factor = 10, signal level ≥ 10 dBm, values in dBc (1 Hz) measured with a low phase noise reference ³⁰

RF input frequency	Offset frequency from the carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz
100 MHz	-125	-136	-150	-160	-170	-173	-175	-177
500 MHz	-118	-135	-148	-160	-175	-175	-175	-175
10 GHz	-100	-112	-124	-140	-150	-160	-160	-160

Additive AM noise sensitivity with external signal source ²⁸

Start offset 1 Hz, cross-correlation factor = 10, signal level ≥ 10 dBm, values in dBc (1 Hz) measured with a low phase noise reference ³⁰

RF input frequency	Offset frequency from the carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz
100 MHz	-114	-125	-140	-155	-168	-175	-175	-175
10 GHz	-106	-115	-130	-140	-150	-160	-165	-165

Auxiliary LO inputs with external or internal signal source ²⁹

These specifications apply both to channel 1 and channel 2.

Input		
Connector	R&S®FSWP8	SMA female, 50 Ω (nom.)
	R&S®FSWP26	SMA female, 50 Ω (nom.)
	R&S®FSWP50 with R&S®FSWP-B64 option, model .27	SMA female, 50 Ω (nom.)
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51	1.85 mm female (compatible with 2.4 mm)
Impedance		50 Ω (nom.)
Maximum input level		+20 dBm

Absolute phase noise measurements with externally tuned LOs ^{28, 29}

Only the R&S®FSWP50 with R&S®FSWP-B64 option, model .51, supports external LO measurements.

The outputs $V_{\text{Tune,LO1}}$ and $V_{\text{Tune,LO2}}$ on the rear of the instrument are used to tune one or two external LOs for external LO measurements. The tuned LOs are fed into the R&S®FSWP with the auxiliary LO inputs.

This allows absolute phase noise measurements with two or three DUTs.

Frequency range	R&S®FSWP50 with R&S®FSWP-B64 option, model .51	100 MHz to 50 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51 and R&S®FSWP-B56G	100 MHz to 56 GHz
Offset frequency range		10 mHz to 40 MHz
Measurement uncertainty		< 2 dB (nom.)
Required LO drive level per input	local oscillator set to external	
	100 MHz \leq signal frequency < 12 GHz	-5 dBm to +10 dBm (nom.)
	12 GHz \leq signal frequency < 16 GHz	0 dBm to +10 dBm (nom.)
	16 GHz \leq signal frequency \leq 18 GHz	+5 dBm to +13 dBm (nom.)
	18 GHz \leq signal frequency \leq 56 GHz	+10 dBm to +13 dBm (nom.)

Output		
Connector		SMA female, 50 Ω (nom.)
Output impedance		100 Ω (nom.)
Minimum DUT impedance		10 k Ω
Output voltage		-8 V to 8 V
Tune bandwidth		up to 1 kHz, depending on sensitivity of LO

³⁰ Explanation of measured values: see section Definitions.

Absolute phase noise sensitivity with externally tuned LOs ²⁸

Start offset 1 Hz, cross-correlation factor = 10, signal level ≥ 10 dBm, values in dBc (1 Hz) measured with a low phase noise reference ³⁰								
RF input frequency	Offset frequency from the carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz
100 MHz	-125	-136	-150	-160	-170	-173	-175	-177
500 MHz	-118	-135	-148	-160	-175	-175	-175	-175
10 GHz	-100	-112	-124	-140	-150	-160	-160	-160

Absolute AM noise sensitivity with externally tuned LOs ²⁸

Start offset 1 Hz, cross-correlation factor = 10, signal level ≥ 10 dBm, values in dBc (1 Hz) measured with a low phase noise reference ³⁰								
RF input frequency	Offset frequency from the carrier							
	1 Hz	10 Hz	100 Hz	1 kHz	10 kHz	100 kHz	1 MHz	10 MHz
100 MHz	-114	-125	-140	-155	-168	-175	-175	-175
10 GHz	-106	-115	-130	-140	-150	-160	-165	-165

Additive phase noise measurements with external I/Q mixers

To extend the frequency range of the additive phase noise measurement, external I/Q mixers are supported.

Frequency range	dependent on used mixer	
	e.g. Marki Microwave MLIQ1845L	18 GHz to 45 GHz
Offset frequency range	10 mHz to 40 MHz	
Required LO drive level	dependent on used mixer	
	e.g. Marki Microwave MLIQ1845L	11 dBm to 18 dBm


Signal source ³¹

Output level range	R&S®FSWP8	
	10 MHz \leq frequency \leq 18 GHz	-60 dBm to +13 dBm ³²
	R&S®FSWP26	
	10 MHz \leq frequency \leq 18 GHz	-60 dBm to +13 dBm ³²
	R&S®FSWP50 with R&S®FSWP-B64 option, model .27	
	10 MHz \leq frequency $<$ 18 GHz	-60 dBm to +13 dBm
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51	
	10 MHz \leq frequency \leq 30 MHz	-30 dBm to +9 dBm
	30 MHz $<$ frequency \leq 3 GHz	-30 dBm to +13 dBm
	3 GHz $<$ frequency \leq 7.5 GHz	-30 dBm to +10 dBm
	7.5 GHz $<$ frequency \leq 18 GHz	-30 dBm to +13 dBm
	18 GHz $<$ frequency \leq 22 GHz	-30 dBm to +8 dBm
	22 GHz $<$ frequency \leq 26.5 GHz	-30 dBm to +5 dBm
	26.5 GHz $<$ frequency \leq 30 GHz	-30 dBm to 0 dBm
30 GHz $<$ frequency \leq 50 GHz	-30 dBm to +5 dBm	
Output level resolution	R&S®FSWP50 with R&S®FSWP-B56G	
	50 GHz $<$ frequency \leq 54 GHz	-30 dBm to 0 dBm
Output level accuracy	0.1 dB	
	R&S®FSWP8, R&S®FSWP26, R&S®FSWP50 with R&S®FSWP-B64 option, model .27; +20 °C to +30 °C	
	10 MHz \leq frequency $<$ 16 GHz	± 2 dB
	16 GHz \leq frequency \leq 18 GHz	+2 dB to -5 dB
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51; +20 °C to +30 °C	
Output pulse width ³³	10 MHz \leq frequency $<$ 20 MHz	± 3 dB
	20 MHz \leq frequency \leq 54 GHz	± 2 dB
	setting range	1 μ s to 999.999 ms
	setting resolution	1 μ s


³¹ An internal DUT bypass is only available with R&S®FSWP-B64 option, model .27.

³² For instruments with R&S®FSWP-B64 option with the part number 1322.9900.26, the output level range is from -50 dBm to +10 dBm in 10 dB steps.

³³ R&S®FSWP-K4 option required.

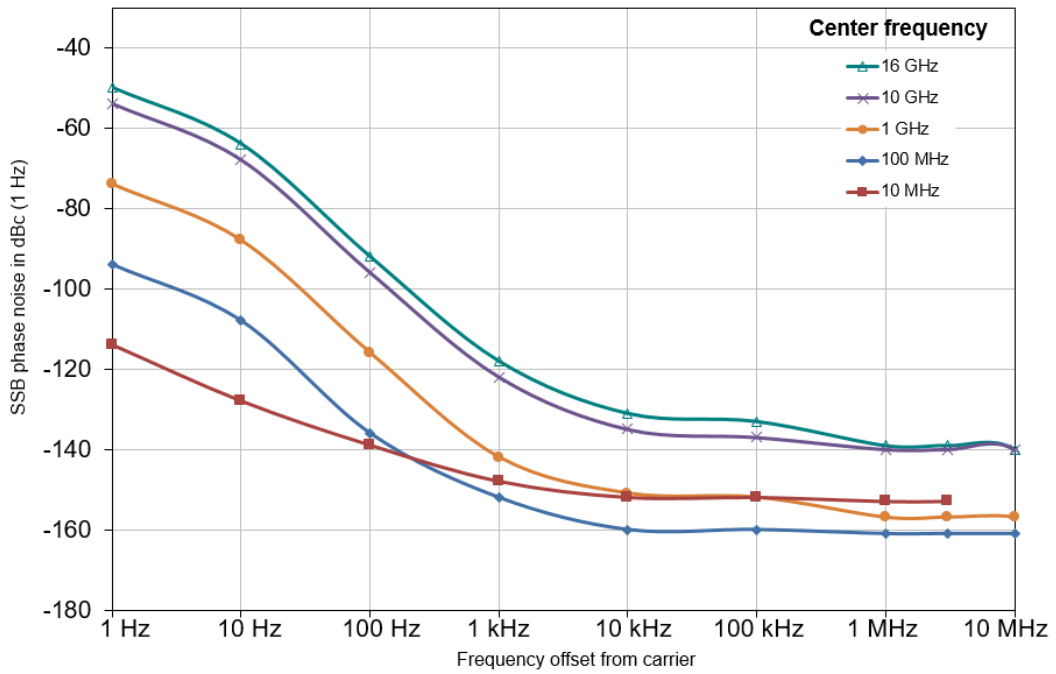

Typical phase noise of signal source output with R&S®FSWP-B61 option

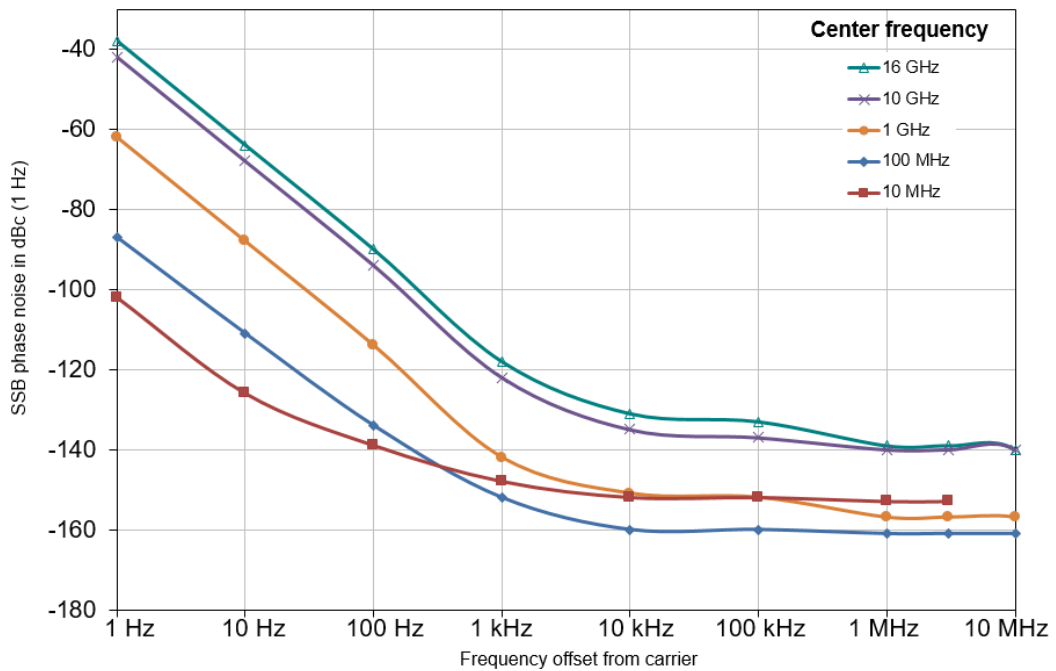

Typical phase noise of signal source output with R&S®FSWP-B60 option

Frequency translating additive phase noise measurements


This measurement is performed in phase noise mode with the signal source used as input signal for the frequency translating device. In this test setup, the signal source and the receiving signal path use the same internal reference frequency for the synthesizers. Therefore the close in phase noise cancels if the DUT is a frequency divider, a frequency multiplier or a DDS chip (which uses the signal source output as clock signal). For this measurement the phase noise sensitivity depends mainly on the input frequency of the R&S®FSWP.

Using the R&S®FSWP it is also possible to measure frequency converters with internal local oscillator. In this case the sensitivity is dependent on the frequency difference between RF input and signal source output.


For typical phase noise sensitivity see the diagrams below.

Frequency range of signal source output	R&S®FSWP8	9.95 MHz to 8 GHz
	R&S®FSWP26	9.95 MHz to 18 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .27	9.95 MHz to 18 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51	100 MHz to 50 GHz
	R&S®FSWP50 with R&S®FSWP-B64 option, model .51 and R&S®FSWP-B56G	100 MHz to 54 GHz
Frequency range of input signal		see Additive phase noise measurements
Offset frequency range		see Additive phase noise measurements
Measurement uncertainty		see Additive phase noise measurements

Frequency translating additive phase noise sensitivity

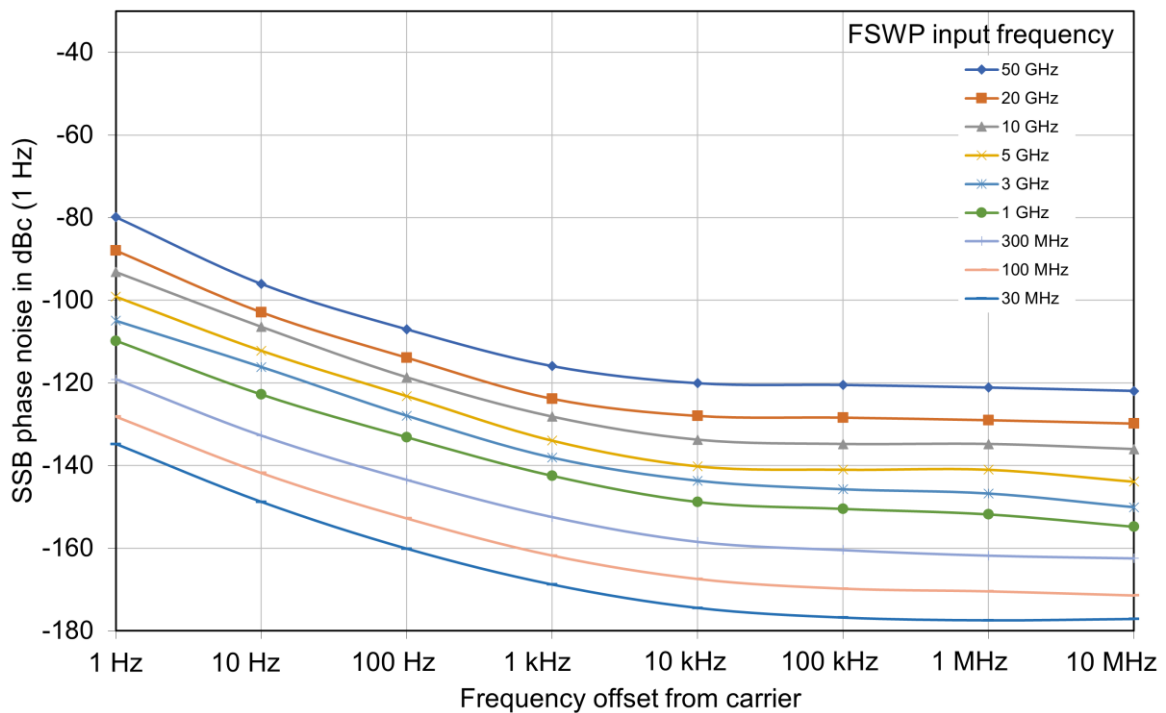


Typical phase noise sensitivity of frequency divider or frequency multiplier measurements
(start offset = 1 Hz, cross-correlation factor = 10)

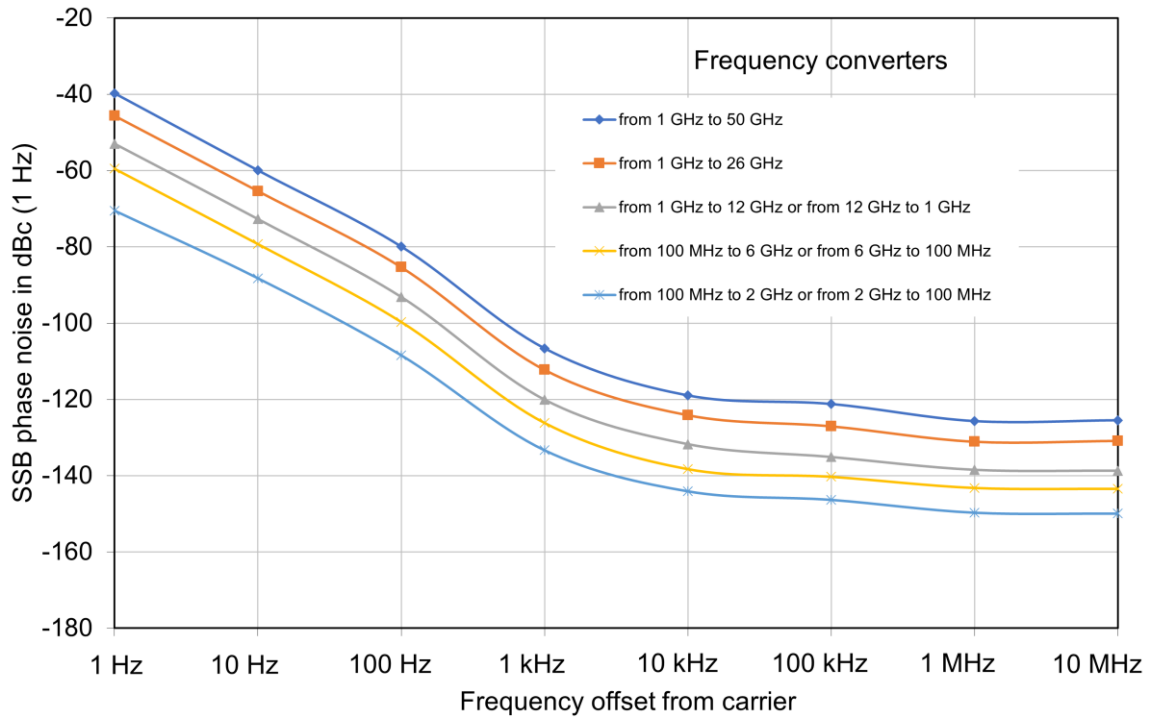

Typical phase noise sensitivity of frequency converter measurements with R&S®FSWP-B61 option (start offset = 1 Hz, cross-correlation factor = 10)

R&S®FSWP-K4 pulsed phase noise measurements


Signal level ≥ 0 dBm		
Offset frequency range		10 mHz to 50 % of the pulse repetition rate
Pulse repetition rate		0.5 μ s to 5 ms
Duty cycle	manual setting, auto search off	0.01 % to 50 %, pulse width > 100 ns
	auto search on	1 % to 50 %, pulse width > 250 ns
Phase noise measurement uncertainty	10 mHz < offset < 1 Hz	< 3 dB
	1 Hz \leq offset \leq 1 MHz	< 2.5 dB
Phase noise sensitivity	The phase noise sensitivity is limited by additional broadband noise dependent on the duty cycle of the input signal. As long as this broadband noise is more than 10 dB below the specified phase noise sensitivity for continuous wave signals, the phase noise sensitivity specification for CW signals applies.	
Noise floor of phase noise sensitivity	start offset = 1 Hz, cross-correlation factor = 1, signal level ≥ 10 dBm	
	gating = on	
	frequency < 18 GHz	-175 dBc (1 Hz) - 10 log(duty cycle) (nom.)
	18 GHz \leq frequency < 30 GHz	-165 dBc (1 Hz) - 10 log(duty cycle) (nom.)
	30 GHz \leq frequency \leq 56 GHz	-155 dBc (1 Hz) - 10 log(duty cycle) (nom.)
	gating = off	
	frequency < 18 GHz	-175 dBc (1 Hz) - 20 log(duty cycle) (nom.)
18 GHz \leq frequency < 30 GHz	-165 dBc (1 Hz) - 20 log(duty cycle) (nom.)	
30 GHz \leq frequency \leq 56 GHz	-155 dBc (1 Hz) - 20 log(duty cycle) (nom.)	

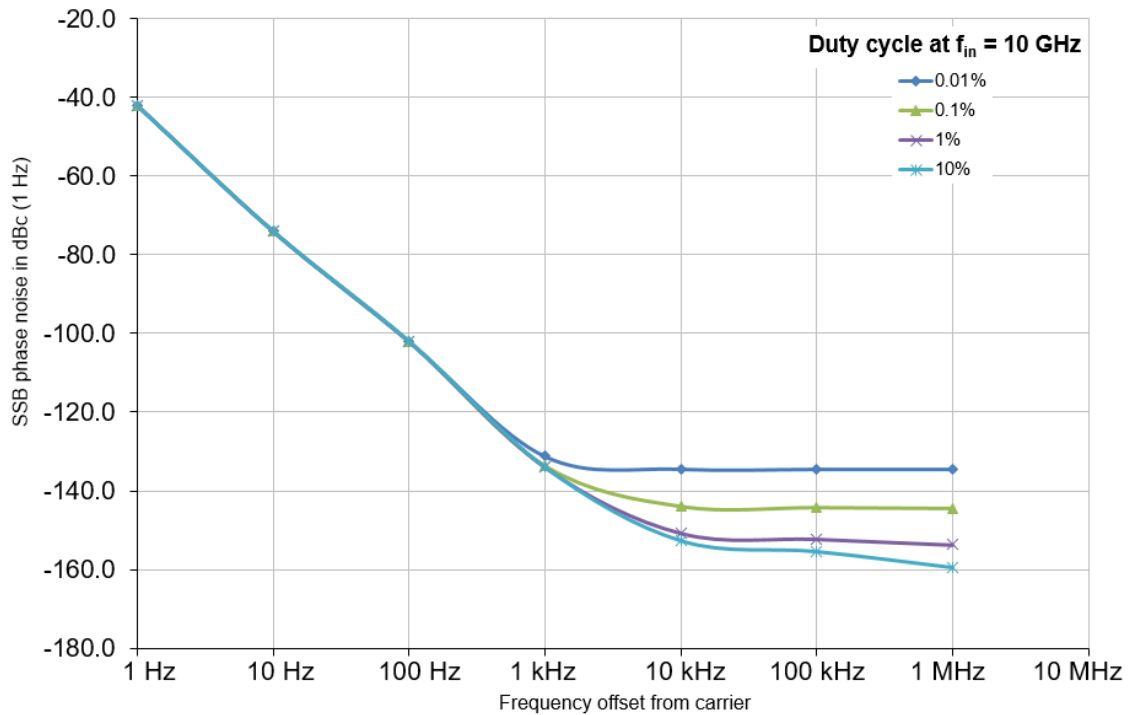

Typical phase noise sensitivity with R&S®FSWP-B60 or R&S®FSWP-B61 option at $f_{in} = 10$ GHz
(start offset = 1 Hz, cross-correlation factor = 1, signal level = 10 dBm, gating = on)

R&S®FSWP-K4 pulsed AM noise measurements

Signal level ≥ 0 dBm		
Offset frequency range		10 mHz to 50 % of the pulse repetition rate
Pulse repetition rate		0.5 μ s to 5 ms
Duty cycle	manual setting, auto search off	0.01 % to 50 %, pulse width > 100 ns
	auto search on	1 % to 50 %, pulse width > 250 ns
AM noise measurement uncertainty	10 mHz < offset < 1 Hz	< 3 dB
	1 Hz \leq offset \leq 1 MHz	< 2.5 dB
AM noise sensitivity	The AM noise sensitivity is limited by additional broadband noise dependent on the duty cycle of the input signal. As long as this broadband noise is more than 10 dB below the specified AM noise sensitivity for continuous wave signals, the phase noise sensitivity specification for CW signals applies.	
Noise floor of phase noise sensitivity	start offset = 1 Hz, cross-correlation factor = 1, signal level ≥ 10 dBm	
	gating = on	
	frequency < 18 GHz	-175 dBc (1 Hz) - 10 log(duty cycle) (nom.)
	18 GHz \leq frequency < 30 GHz	-165 dBc (1 Hz) - 10 log(duty cycle) (nom.)
	30 GHz \leq frequency \leq 56 GHz	-155 dBc (1 Hz) - 10 log(duty cycle) (nom.)
	gating = off	
	frequency < 18 GHz	-175 dBc (1 Hz) - 20 log(duty cycle) (nom.)
18 GHz \leq frequency < 30 GHz	-165 dBc (1 Hz) - 20 log(duty cycle) (nom.)	
30 GHz \leq frequency \leq 56 GHz	-155 dBc (1 Hz) - 20 log(duty cycle) (nom.)	

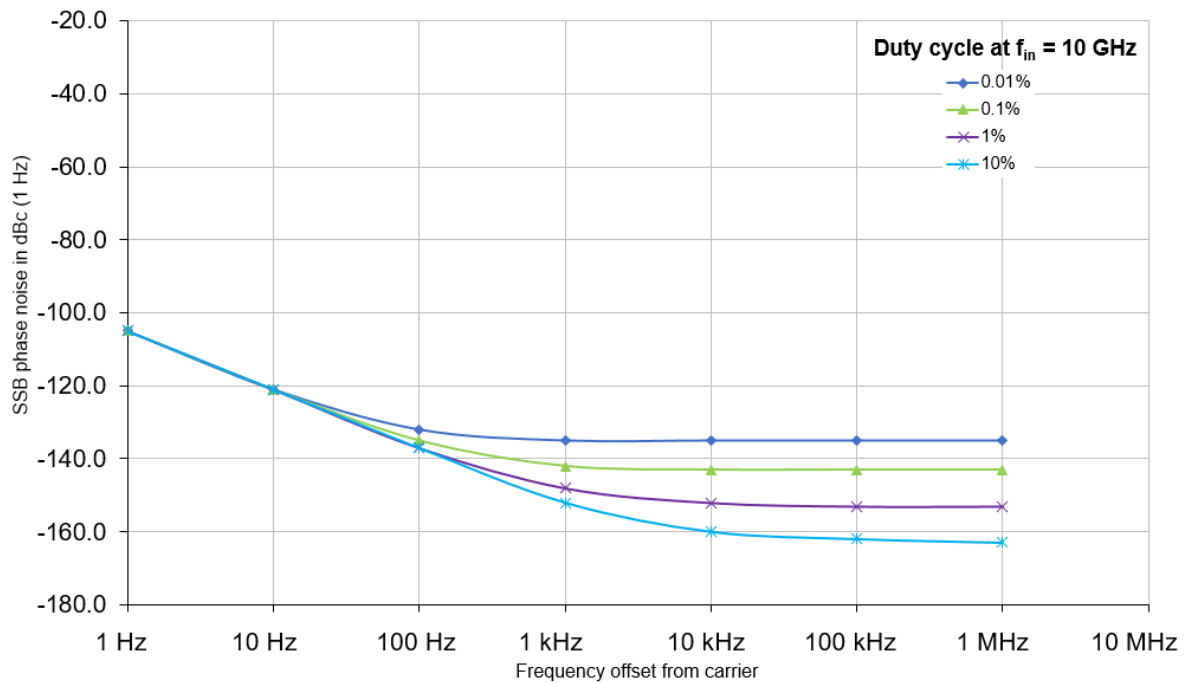

Typical AM noise sensitivity at $f_{in} = 10$ GHz
 (start offset = 1 Hz, cross-correlation factor = 1, signal level = 10 dBm, gating = on)

R&S®FSWP-K980 health and utilization monitoring service (HUMS)

Health and utilization monitoring service (HUMS) ^{34, 35}		
Interfaces	protocols and interfaces supported for data readout and display	<ul style="list-style-type: none"> • SNMP (v1, v2c, v3) • REST (JSON) • SCPI • device web
Services	information provided	<ul style="list-style-type: none"> • device information (model, serial number, BIOS, date, time, system, HUMS and software information) • user-defined information tags (e.g. for asset management) • equipment information (hardware, options, software, licenses) • system operating status • instrument security information • service related information (due dates etc.) • mass storage related information • instrument utilization data • device history (event log)

³⁴ For details see application note under: www.rohde-schwarz.com/appnote/GFM336.

³⁵ For use with common available asset management tools.

Ordering information

Designation	Type	Order No.
Phase noise analyzer and VCO tester, 1 MHz to 8 GHz	R&S®FSWP8	1322.8003.09
Phase noise analyzer and VCO tester, 1 MHz to 26.5 GHz	R&S®FSWP26	1322.8003.27
Phase noise analyzer and VCO tester, 1 MHz to 50 GHz	R&S®FSWP50	1322.8003.51
Accessories supplied		
Power cable, quick start guide, R&S®FSWP26: adapter, 3.5 mm (APC3.5-compatible), female/female, R&S®FSWP50: adapter, 1.85 mm, female/female, R&S®FSWP50 with R&S®FSWP-B64 option, model .51: LO auxiliary jumper plugs for additive phase noise measurements with internal LO		

Options

Designation	Type	Order No.	Retrofittable	Remarks
Cross-correlation, 8 GHz	R&S®FSWP-B60	1322.9800.08	yes	for R&S®FSWP8, always included, if no R&S®FSWP-B61 option installed
Cross-correlation, 26 GHz	R&S®FSWP-B60	1322.9800.26	yes	for R&S®FSWP26, always included, if no R&S®FSWP-B61 option installed
Cross-correlation, 50 GHz	R&S®FSWP-B60	1322.9800.50	yes	for R&S®FSWP50, always included, if no other R&S®FSWP-B60 option or R&S®FSWP-B61 option installed
Cross-correlation, 50 GHz	R&S®FSWP-B60	1322.9800.51	yes	for R&S®FSWP50
Cross-correlation (low phase noise), 8 GHz	R&S®FSWP-B61	1325.3719.08	yes	for R&S®FSWP8, contact service center, includes R&S®FSWP-B4 option
Cross-correlation (low phase noise), 26 GHz	R&S®FSWP-B61	1325.3719.26	yes	for R&S®FSWP26, retrofittable in factory, includes R&S®FSWP-B4 option
Cross-correlation (low phase noise), 50 GHz	R&S®FSWP-B61	1325.3719.50	yes	for R&S®FSWP50, retrofittable in factory for R&S®FSWP50 with R&S®FSWP-B60 option, model .50, includes R&S®FSWP-B4 option
Cross-correlation (low phase noise), 50 GHz	R&S®FSWP-B61	1325.3719.51	yes	for R&S®FSWP50, retrofittable in factory for R&S®FSWP50 with R&S®FSWP-B60 option, model .51, includes R&S®FSWP-B4 option
Additive phase noise measurements	R&S®FSWP-B64	1322.9900.27	yes	for R&S®FSWP8, R&S®FSWP26 and R&S®FSWP50 with R&S®FSWP-B60 option, model .50 or R&S®FSWP-B61 option, model .50, frequency range: 10 MHz to 8 GHz for R&S®FSWP8, 10 MHz to 18 GHz for R&S®FSWP26 and R&S®FSWP50, contact service center

Designation	Type	Order No.	Retrofittable	Remarks
Additive phase noise measurements	R&S®FSWP-B64	1322.9900.51	yes	for R&S®FSWP50 with R&S®FSWP-B60 option, model .51 or R&S®FSWP-B61 option, model .51, frequency range: 100 MHz to 50 GHz for R&S®FSWP50, 100 MHz to 54 GHz with internal signal source and 100 MHz to 56 GHz with external signal source for R&S®FSWP50 with R&S®FSWP-B56G option, contact service center
High stability OCXO	R&S®FSWP-B4	1325.3890.02	yes	user-retrofittable
Spectrum analyzer, 10 Hz to 8 GHz	R&S®FSWP-B1	1322.9997.08	yes	for R&S®FSWP8, retrofittable in factory
Spectrum analyzer, 10 Hz to 26 GHz	R&S®FSWP-B1	1322.9997.26	yes	for R&S®FSWP26, retrofittable in factory
Spectrum analyzer, 10 Hz to 50 GHz	R&S®FSWP-B1	1322.9997.50	yes	for R&S®FSWP50, retrofittable in factory
External generator control	R&S®FSWP-B10	1325.5463.02	yes	for R&S®FSWP8/26/50 with R&S®FSWP-B1 option, contact service center
Resolution bandwidth up to 80 MHz	R&S®FSWP-B8	1325.5028.26	no	for R&S®FSWP8/26 with R&S®FSWP-B1 option; the signal analysis bandwidth is defined by the R&S®FSWP-B80 option, not by the R&S®FSWP-B8 option
Resolution bandwidth up to 80 MHz	R&S®FSWP-B8	1325.5028.02	no	for R&S®FSWP50 with R&S®FSWP-B1 option; the signal analysis bandwidth is defined by the R&S®FSWP-B80 option, not by the R&S®FSWP-B8 option; export license required
Resolution bandwidth up to 40 MHz	R&S®FSWP-B8E	1338.7099.02	yes	for R&S®FSWP8/26/50 with R&S®FSWP-B1 option; the signal analysis bandwidth is defined by the R&S®FSWP-B80/-B320 options, not by the R&S®FSWP-B8E option; user-retrofittable
Highpass filter, for harmonic measurements	R&S®FSWP-B13	1325.4350.02	yes	for R&S®FSWP8/26/50 with R&S®FSWP-B1 option, user-retrofittable
LO/IF connections, for external mixers	R&S®FSWP-B21	1325.3848.02	yes	for R&S®FSWP26/50, contact service center, includes two cables for IF and LO ports (length: 1 m)
RF preamplifier, 100 kHz to 8 GHz	R&S®FSWP-B24	1325.3725.08	yes	for R&S®FSWP8 with R&S®FSWP-B1 option, contact service center
RF preamplifier, 100 kHz to 26.5 GHz	R&S®FSWP-B24	1325.3725.26	yes	for R&S®FSWP26 with R&S®FSWP-B1 option, contact service center
RF preamplifier, 100 kHz to 50 GHz	R&S®FSWP-B24	1325.3725.50	yes	for R&S®FSWP50 with R&S®FSWP-B1 option, contact service center
Frequency extension, up to 56 GHz	R&S®FSWP-B56G	1357.7878.02	yes	for R&S®FSWP50 with R&S®FSWP-B60 option, model .51 or R&S®FSWP-B61 option, model .51, contact service center

Designation	Type	Order No.	Retrofittable	Remarks
80 MHz analysis bandwidth	R&S®FSWP-B80	1325.4338.02	yes	for R&S®FSWP8/26/50 with R&S®FSWP-B1 option, user-retrofittable
320 MHz analysis bandwidth	R&S®FSWP-B320	1338.3235.04	yes	for R&S®FSWP8/26/50 with R&S®FSWP-B1 option, contact service center
Spare solid-state drive (removable hard drive)	R&S®FSWP-B18	1331.4313.21	yes	user-retrofittable
USB-B port for instrument control	R&S®FSW-B112	1353.3290.02	yes	user-retrofittable

Firmware

Designation	Type	Order No.	Remarks
Pulsed phase noise measurements	R&S®FSWP-K4	1325.5043.02	
Pulse measurement application	R&S®FSWP-K6	1325.4221.02	R&S®FSWP-B1 option required
Pulse stability measurements	R&S®FSWP-K6P	1338.3106.02	R&S®FSWP-B1, R&S®FSWP-B64 and R&S®FSWP-K6 options required
Time sidelobe measurements	R&S®FSWP-K6S	1325.5363.02	R&S®FSWP-B1 and R&S®FSWP-K6 options required
AM/FM/PM modulation analysis	R&S®FSWP-K7	1325.4238.02	R&S®FSWP-B1 option required
Enhanced specification for AM/FM/PM modulation analysis	R&S®FSWP-K7CAL	1331.6468.02	R&S®FSWP-B1 and R&S®FSWP-K7 options required
Noise power ratio measurements	R&S®FSWP-K19	1350.5963.02	R&S®FSWP-B1 option required
Noise figure measurements	R&S®FSWP-K30	1325.4244.02	R&S®FSWP-B1 option required
Security write protection of solid-state drive	R&S®FSWP-K33	1325.5040.02	
Spurious measurements	R&S®FSWP-K50	1338.3358.02	R&S®FSWP-B1 option required
Transient measurements	R&S®FSWP-K60	1338.4525.02	R&S®FSWP-B1 option required
Transient chirp measurements	R&S®FSWP-K60C	1338.4531.02	R&S®FSWP-B1 and R&S®FSWP-K60 options required
Transient hop measurements	R&S®FSWP-K60H	1338.4548.02	
Transient phase noise measurements	R&S®FSWP-K60P	1353.2420.02	R&S®FSWP-B1, R&S®FSWP-K60 and R&S®FSWP-K60C or R&S®FSWP-K60H options required
Vector signal analysis	R&S®FSWP-K70	1325.4280.02	R&S®FSWP-B1 option required
Multi-modulation analysis	R&S®FSWP-K70M	1350.6860.02	R&S®FSWP-B1 and R&S®FSWP-K70 options required
BER PRBS measurements	R&S®FSWP-K70P	1350.6876.02	R&S®FSWP-B1 and R&S®FSWP-K70 options required
Health and utilization monitoring service (HUMS)	R&S®FSWP-K980	1350.6724.02	

Recommended extras

Designation	Type	Order No.
IEC/IEEE bus cable, length: 1 m	R&S®PCK	0292.2013.10
IEC/IEEE bus cable, length: 2 m	R&S®PCK	0292.2013.20
Front cover	R&S®ZZF-511	1174.8825.00
19" rack adapter	R&S®ZZA-KN5B	1703.1352.00
Noise sources		
Smart noise sources for noise figure and gain measurement up to 110 GHz (requires R&S®FSWP-B1 and R&S®FSWP-K30)	R&S®FS-SNS18/26/40/55/67/90/110	1338.8008.xx (xx = 18/26/40/55/67/90/11)
Matching pads, 50/75 Ω		
L section, matching at both ends	R&S®RAM	0358.5414.02
Series resistor, 25 Ω, matching at one end (taken into account in instrument function RF INPUT 75 Ω)	R&S®RAZ	0358.5714.02
High-power attenuators		
100 W, 3 dB, 1 GHz	R&S®RBU100	1073.8495.03
100 W, 6 dB, 1 GHz	R&S®RBU100	1073.8495.06
100 W, 10 dB, 1 GHz	R&S®RBU100	1073.8495.10
100 W, 20 dB, 1 GHz	R&S®RBU100	1073.8495.20
100 W, 30 dB, 1 GHz	R&S®RBU100	1073.8495.30
50 W, 3 dB, 2 GHz	R&S®RBU50	1073.8695.03
50 W, 6 dB, 2 GHz	R&S®RBU50	1073.8695.06
50 W, 10 dB, 2 GHz	R&S®RBU50	1073.8695.10
50 W, 20 dB, 2 GHz	R&S®RBU50	1073.8695.20
50 W, 30 dB, 2 GHz	R&S®RBU50	1073.8695.30
50 W, 20 dB, 6 GHz	R&S®RDL50	1035.1700.52
Connectors and cables		
Coaxial adapter, N (f)/3.5 mm (f), APC3.5-compatible	(for R&S®FSWP8)	3587.7829.00
Coaxial adapter, 3.5 mm (f/f), APC3.5-compatible	(for R&S®FSWP26)	3689.9442.00
Coaxial adapter, 1.85 mm (f/f), APC2.4-compatible	(for R&S®FSWP50)	3588.9654.00
RF cable, length: 1 m, SMA (f/f)	(for R&S®FSWP-B21)	3586.9970.00
Cable with ferrite bead, length: 1 m, BNC (m/m), for V tune port		1322.8861.00
Probe power connector, 3-pin		1065.9480.00
N-type adapter, for R&S®RT-Zxx oscilloscope probes	R&S®RT-ZA9	1417.0909.02
DC block		
DC block, 10 kHz to 18 GHz (type N)	R&S®FSE-Z4	1084.7443.03
External harmonic mixers (for instruments with R&S®FSWP-B21 option)		
Harmonic mixer, 40 GHz to 60 GHz	R&S®FS-Z60	1048.0171.02
Harmonic mixer, 50 GHz to 75 GHz	R&S®FS-Z75	3638.2240.02
Harmonic mixer, 60 GHz to 90 GHz	R&S®FS-Z90	3638.2270.02
Harmonic mixer, 75 GHz to 110 GHz	R&S®FS-Z110	3638.2292.02
Harmonic mixer, 90 GHz to 140 GHz	R&S®FS-Z140	3622.0708.02
Harmonic mixer, 110 GHz to 170 GHz	R&S®FS-Z170	3622.0714.02
Harmonic mixer, 140 GHz to 220 GHz	R&S®FS-Z220	3593.3250.02
Harmonic mixer, 220 GHz to 325 GHz	R&S®FS-Z325	3593.3267.02
External I/Q mixer (for instruments with R&S®FSWP-B64 option)		
I/Q mixer from Marki Microwave	MLIQ1845L	

Power sensors supported (R&S®FSWP-B1 option required) ³⁶

Designation	Type	Order No.
Universal power sensors		
10 MHz to 8 GHz, 100 mW, two-path	R&S®NRP-Z211	1417.0409.02
10 MHz to 8 GHz, 200 mW	R&S®NRP-Z11 ³⁷	1138.3004.02
10 MHz to 18 GHz, 100 mW, two-path	R&S®NRP-Z221	1417.0309.02
10 MHz to 18 GHz, 200 mW	R&S®NRP-Z21 ³⁷	1137.6000.02
10 MHz to 18 GHz, 2 W	R&S®NRP-Z22 ³⁷	1137.7506.02
10 MHz to 18 GHz, 15 W	R&S®NRP-Z23 ³⁷	1137.8002.02
10 MHz to 18 GHz, 30 W	R&S®NRP-Z24 ³⁷	1137.8502.02
Power sensor modules with power splitter		
DC to 18 GHz, 500 mW	R&S®NRP-Z27	1169.4102.02
DC to 26.5 GHz, 500 mW	R&S®NRP-Z37	1169.3206.02
Thermal power sensors		
0 Hz to 18 GHz, 100 mW	R&S®NRP18T	1424.6115.02
0 Hz to 18 GHz, 100 mW, LAN version	R&S®NRP18TN	1424.6121.02
0 Hz to 33 GHz, 100 mW	R&S®NRP33T	1424.6138.02
0 Hz to 33 GHz, 100 mW, LAN version	R&S®NRP33TN	1424.6144.02
0 Hz to 40 GHz, 100 mW	R&S®NRP40T	1424.6150.02
0 Hz to 40 GHz, 100 mW, LAN version	R&S®NRP40TN	1424.6167.02
0 Hz to 50 GHz, 100 mW	R&S®NRP50T	1424.6173.02
0 Hz to 50 GHz, 100 mW, LAN version	R&S®NRP50TN	1424.6180.02
0 Hz to 67 GHz, 100 mW	R&S®NRP67T	1424.6196.02
0 Hz to 67 GHz, 100 mW, LAN version	R&S®NRP67TN	1424.6209.02
0 Hz to 110 GHz, 100 mW	R&S®NRP110T	1424.6215.02
Average power sensors		
8 kHz to 6 GHz, 200 mW	R&S®NRP6A	1424.6796.02
8 kHz to 6 GHz, 200 mW, LAN version	R&S®NRP6AN	1424.6809.02
9 kHz to 6 GHz, 2 W	R&S®NRP-Z92 ³⁷	1171.7005.02
8 kHz to 18 GHz, 200 mW	R&S®NRP18A	1424.6815.02
8 kHz to 18 GHz, 200 mW, LAN version	R&S®NRP18AN	1424.6821.02
Three path diode power sensors		
100 pW to 200 mW, 10 MHz to 8 GHz	R&S®NRP8S	1419.0006.02
100 pW to 200 mW, 10 MHz to 8 GHz, LAN version	R&S®NRP8SN	1419.0012.02
100 pW to 200 mW, 10 MHz to 18 GHz	R&S®NRP18S	1419.0029.02
100 pW to 200 mW, 10 MHz to 18 GHz, LAN version	R&S®NRP18SN	1419.0035.02
100 pW to 200 mW, 10 MHz to 33 GHz	R&S®NRP33S	1419.0064.02
100 pW to 200 mW, 10 MHz to 33 GHz, LAN version	R&S®NRP33SN	1419.0070.02
100 pW to 100 mW, 50 MHz to 40 GHz	R&S®NRP40S	1419.0041.02
100 pW to 100 mW, 50 MHz to 40 GHz, LAN version	R&S®NRP40SN	1419.0058.02
Wideband power sensor		
50 MHz to 18 GHz, 100 mW	R&S®NRP-Z81 ³⁷	1137.9009.02

³⁶ For average power measurement only.³⁷ Product discontinued.

Warranty and service

Warranty		
Base unit		1 year
All other items		1 year
Service options		
	Service plans	On demand
Calibration	up to five years ³⁸	pay per calibration
Warranty and repair	up to five years ³⁸	standard price repair
Contact your Rohde & Schwarz sales office for further details.		

³⁸ For extended periods contact your Rohde & Schwarz sales office.

Service at Rohde & Schwarz
You're in great hands

- ▶ Worldwide
- ▶ Local and personalized
- ▶ Customized and flexible
- ▶ Uncompromising quality
- ▶ Long-term dependability

Rohde & Schwarz

The Rohde & Schwarz technology group is among the trailblazers when it comes to paving the way for a safer and connected world with its leading solutions in test & measurement, technology systems and networks & cybersecurity. Founded more than 90 years ago, the group is a reliable partner for industry and government customers around the globe. The independent company is headquartered in Munich, Germany and has an extensive sales and service network with locations in more than 70 countries.

www.rohde-schwarz.com

Sustainable product design

- ▶ Environmental compatibility and eco-footprint
- ▶ Energy efficiency and low emissions
- ▶ Longevity and optimized total cost of ownership

Certified Quality Management

ISO 9001

Certified Environmental Management

ISO 14001

More Rohde & Schwarz certificates



Rohde & Schwarz training

www.training.rohde-schwarz.com

Rohde & Schwarz customer support

www.rohde-schwarz.com/support

