

MINIFLOW RAPID

Cable blowing machine for ACCESS NETWORK

- **Rugged stainless construction**

The machine is designed based on functionality including:

- Safety chain guard
- Adjustable knobs
- Push force indicator

- **Fast cable blowing**

The machine is capable of installing fiber cable at a speed up to 100 m/min. and up to a distance of 3.5 km making it a compact and efficient cable blowing machine.

- **Built-in electronic counter and tachometer**


The counter is easy to read, robust and simple to operate.

- **Robust and compact**

The machine is constructed in stainless steel and anodized aluminium, which makes it suited for use under rugged conditions at cable blowing locations.

- **Flexible**


The machine can quickly be adapted to accommodate different cable and duct sizes making it flexible to fit every fiber blowing job.

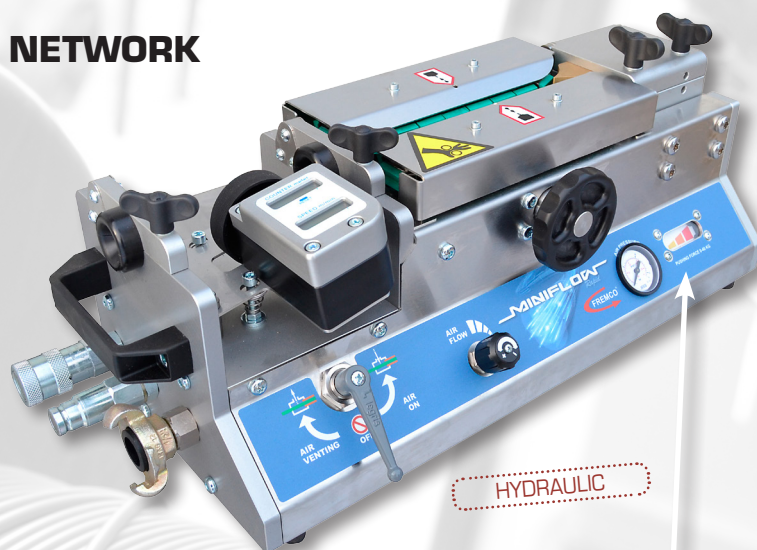

Cable damage safety

MiniFlow RAPID has a unique monitoring system, which continuously monitors the pushing force applied on the fiber cable. This makes it easy to stop the process before any damage happens to the cable.

Pushing force in kilogram

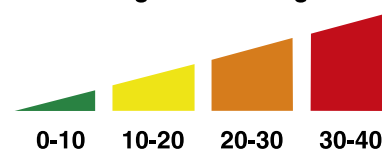

DON'T FORGET TO ORDER

- Hydraulic Power Pack/Control valve high pressure compressor.

Item no.: 101-10102 & 101-10103

SPECIFICATIONS

Item no.:	101-10031
Micro cable diameter ¹ :	3 - 12 mm
Microduct diameter:	7 - 20 mm
Blowing distance ² :	Up to 3500 m
Blowing speed ² :	Up to 100 m/min.
Recommended pressure and airflow ³ :	8-16 bar (1,000 l/pr. min.)
Weight:	24 kg
Length:	650 mm
Width:	225 mm
Height:	210 mm

¹) Two sets of chains needed (3-8 mm / 4-12 mm).


²) Depending on type of microduct and cable.

³) Cooled and dried air.




MINIFLOW RAPID

PLEASE
STATE
CABLE SIZE AND
DUCT SIZE

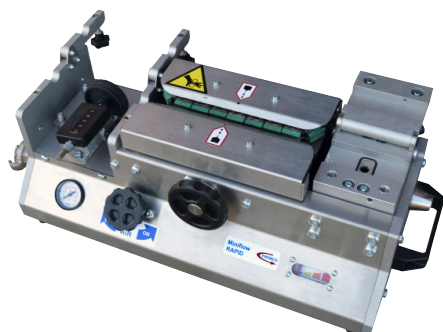


BASIC configured with chains.

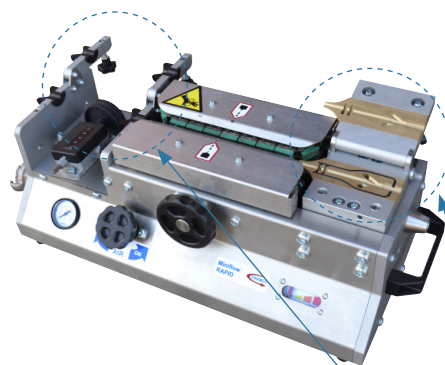

Configured machine with both inlet guides and adaptor plates. Ready to operate.


The MiniFlow RAPID must be fitted with appropriate adaptor plate set and cable seals. The set consists of an upper and a lower plate, which together form a compact airtight unit around duct and fiber. In addition, nylon inlet guides have to match the current cable.

Adaptor plates

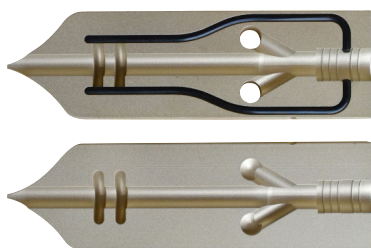

Adaptor plates are available in many combinations of duct and cable dimensions.

Chains

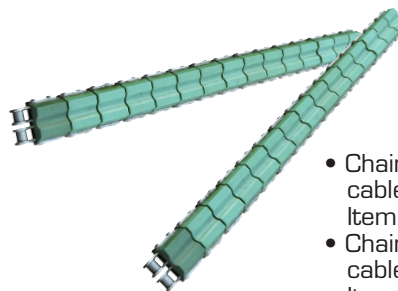

- Chain for Miniflow 4-12 mm cables.
Item no.: 103-20013
- Chain for Miniflow for small cables 3-8 mm.
Item no.: 103-20353

Cable Seals



Complete box with cable seals (5 pcs of each size). Room for adaptor plates as illustrated.

Cable seals are available in sizes from 3 mm to 12 mm. Blanks to make special dimensions are also available.

Item no.: 103-20611

Inlet guide



Nylon inlet guide bushes. Available for 5-13 mm cables.

